




CE

EN



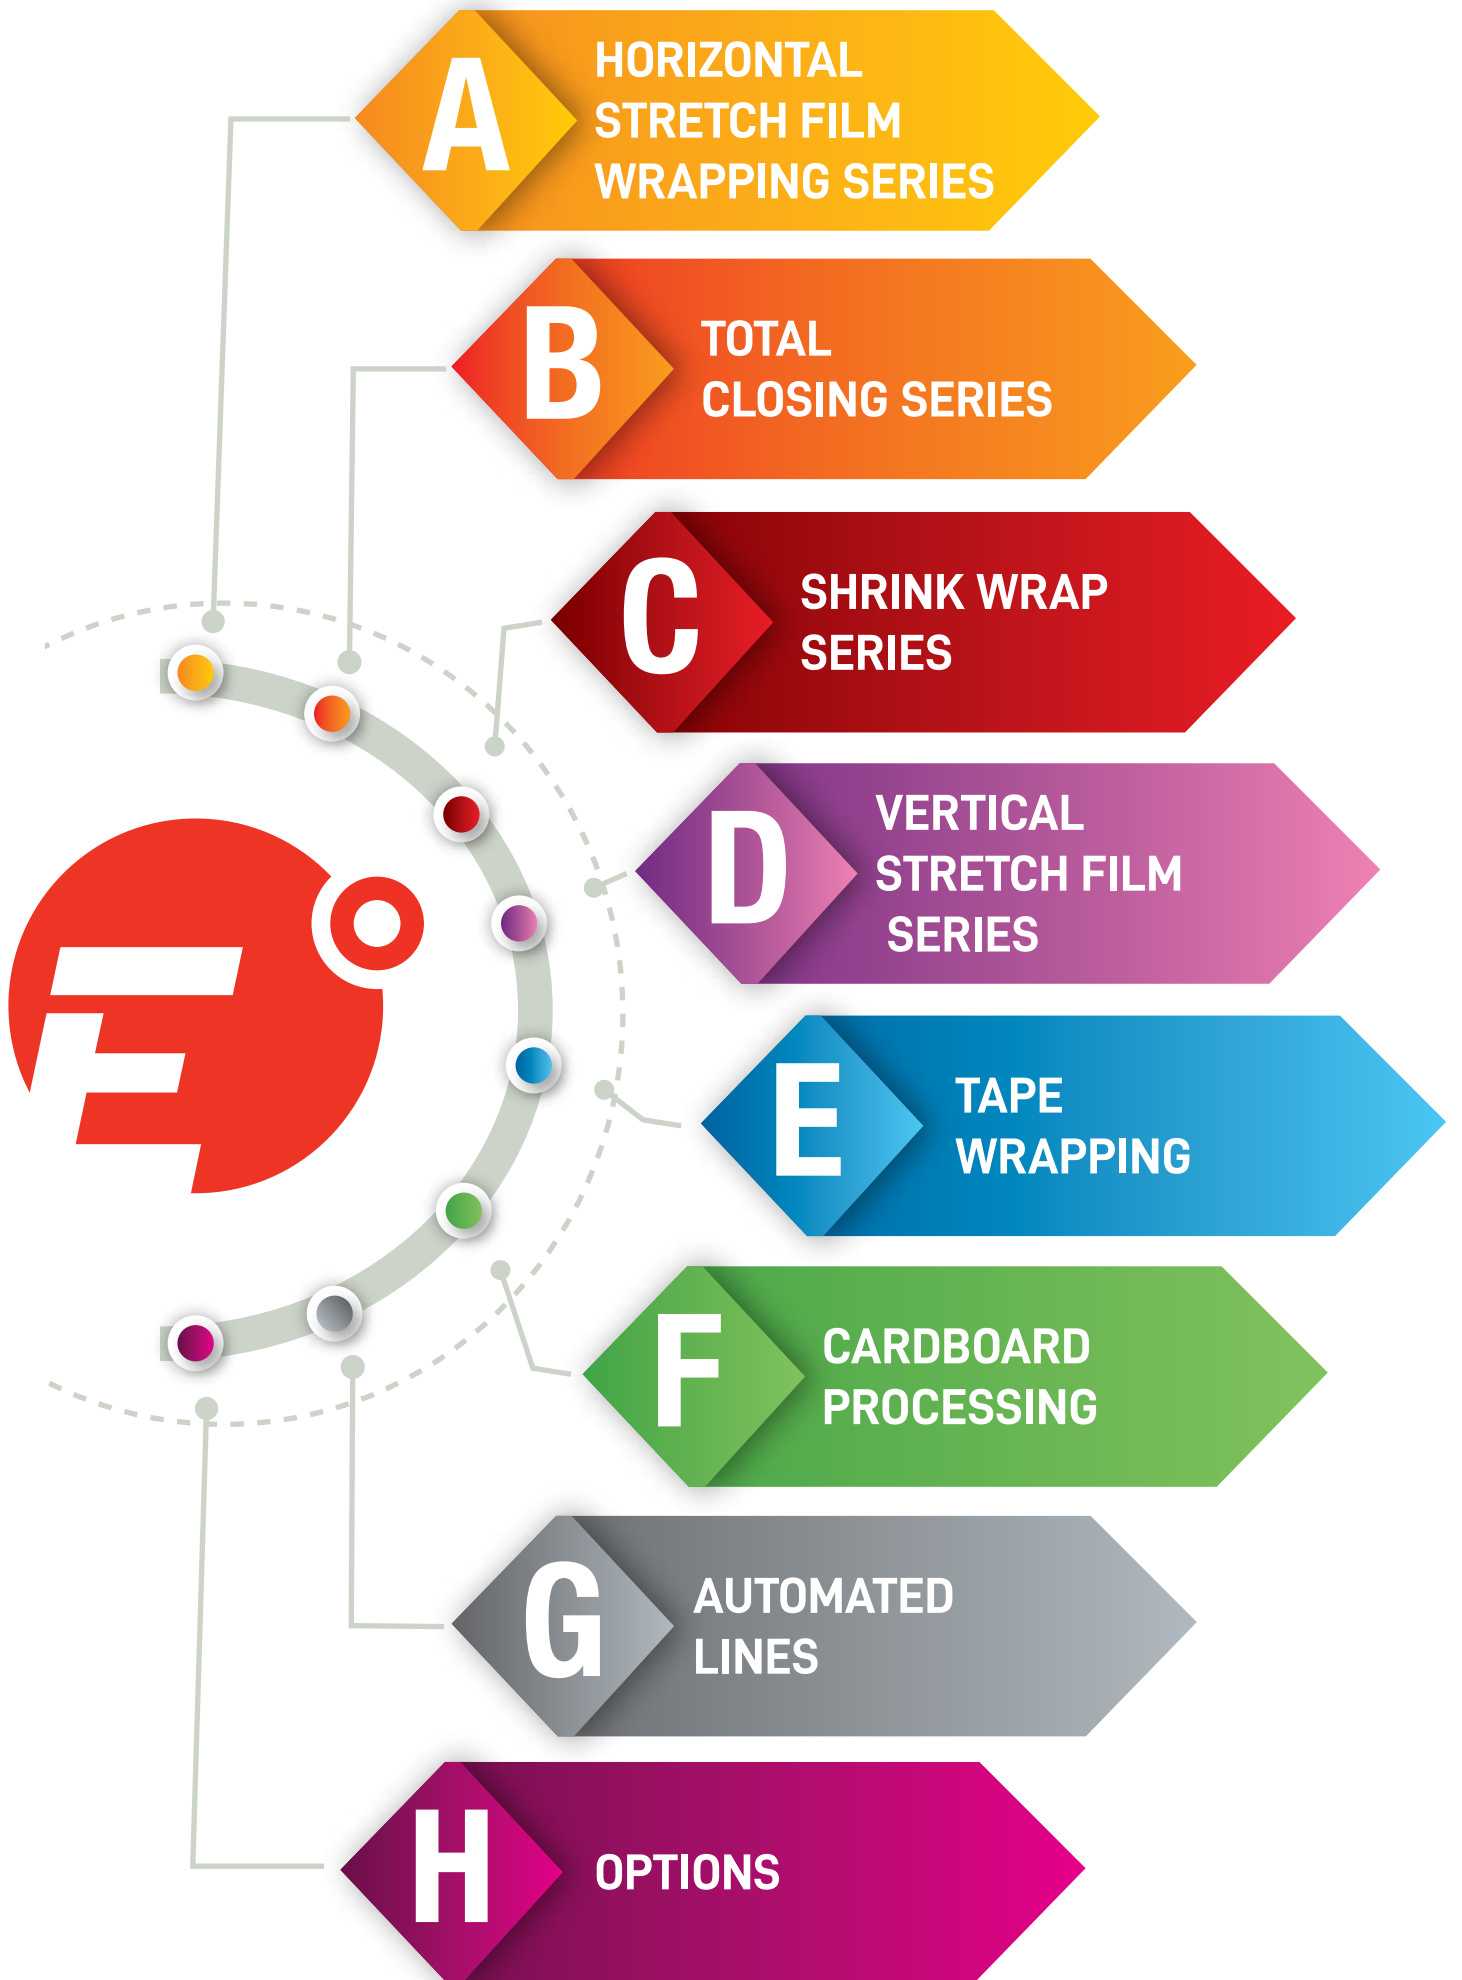

SPINNER 450 S

SPINNER 1000 S

SPINNER 1500 S

SPINNER 1800 S


SPINNER 2200 S

EASYWRAP 50

EASYWRAP 100

EASYWRAP 150

SPEEDWRAP 550




SPINNER 450 S BN

SPINNER 1000 S BN

SPINNER 1500 S BN

SPINNER 1800 S BN

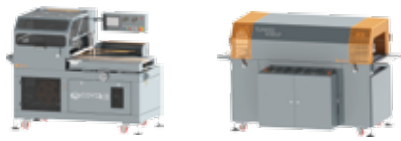

COVERR

TUNNEL WRAP



WRAPTOR

WRAPTOR TP

ROBOWRAP



TAPE MASTER

TAPE MASTER ADVANCE



BOXMASTER

BOXMASTER ADVANCE

SEALMASTER



SPINNER 1800 SOFA PACKING LINE

SPEEDWRAP PROFILINE

HEAVY DUTY LINES



C-WRAP


PNEUMATIC LIFTER CONVEYOR

MOTORISED CONVEYOR

NON-MOTORISED REEL CONVEYOR

SCISSOR LIFT

HEAVY DUTY ROLLER CONVEYOR

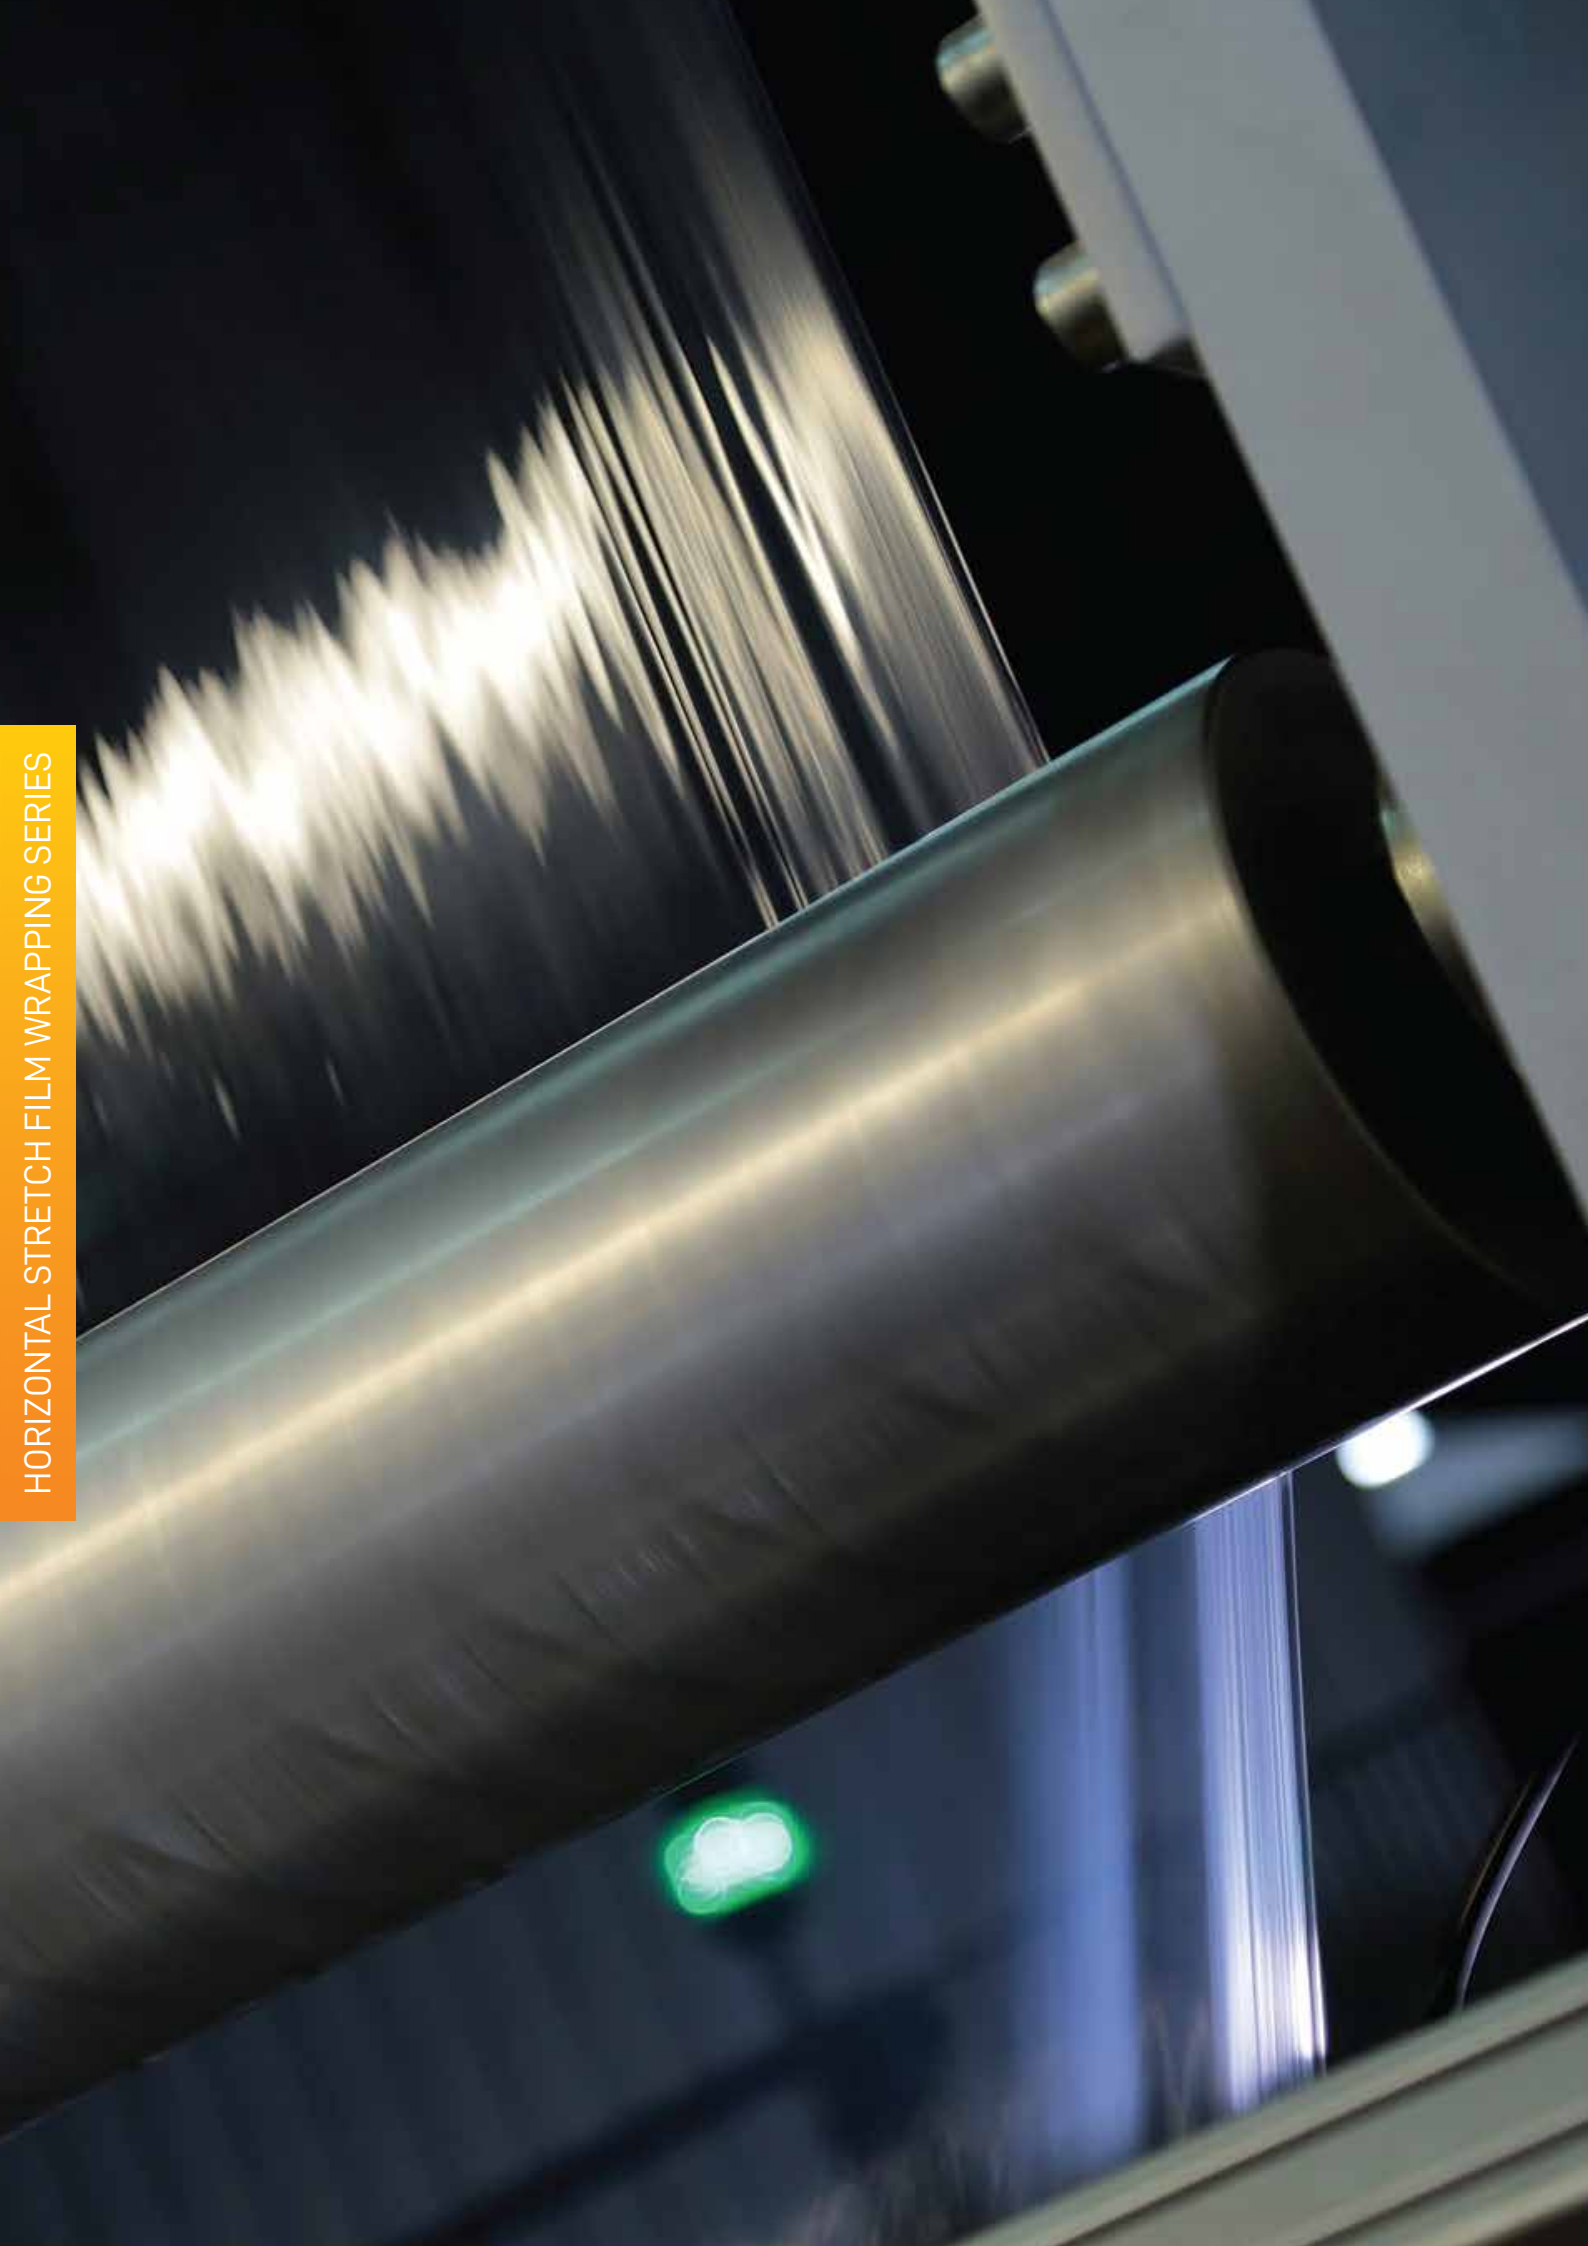

HORIZONTAL STRETCH FILM WRAPPING SERIES

# SPINNER 450 S

DOOR FRAMES AND MOULDINGS - LAMINATE FLOORING - ALUMINIUM, STEEL AND WOOD PROFILES AND PIPES- PVC PROFILE PRODUCTS ETC.

Ask for details



HORIZONTAL STRETCH FILM WRAPPING SERIES

## TECHNICAL FEATURES

### PRODUCT TO WRAP SIZES

Max. Length		Unlimited	
Min. Dimensions (Width x Height x Length)	mm/inch	100 x 18 x 600	$3^{15/16} \text{''} \times 1^{1/16} \text{''} \times 23^{5/8} \text{''}$ * With Short Part Nail

### CONVEYOR BELT'S FEATURES

Useful Length	mm/inch	1820	$71^{5/8} \text{''}$
Total Length	mm/inch	2000	$78^{3/4} \text{''}$
Working Height	mm/inch	901	$35^{1/2} \text{''}$
Electric Motor Power	kW	0,55	
Max. Conveyor Speed	meter/min.	15	
Max. Load Capacity	kgs/meter	100	

### STRETCH FILM FEATURES

Max. Width	mm/inch	200	$7^{7/8} \text{''}$
Max. Diameter	mm/inch	Ø230	$9^{1/16} \text{''}$ (Max. Weight: 3 kg)
Reel Core Diameter	mm/inch	Ø76	$3 \text{''}$
Recommended Thickness	micron	23, 30, 35	

### MACHINE GENERAL FEATURES

Main Motor Power	kW	1,1	
Max. Ring Rotation Speed	rpm	160	
Min. Ring Rotation Speed	rpm	40	
Standard Machine Dimensions (W X H X L)	mm/inch	1571 x 1593 x 4220	$61^{7/8} \text{''} \times 62^{11/16} \text{''} \times 166^{1/8} \text{''}$
Total Weight	kg	590	

# SPINNER 1000 S

MEMBRANE, ACRYLIC AND LACQUER PAINTED COVERS - BATHROOMS AND KITCHEN CABINETS - DOORS - DOOR FRAMES AND MOULDINGS  
LAMINATE FLOORING - ALUMINIUM , STEEL AND WOOD PROFILES AND PIPES- PVC PROFILE PRODUCTS ETC.

Ask for details



HORIZONTAL STRETCH FILM WRAPPING SERIES

## TECHNICAL FEATURES

### PRODUCT TO WRAP SIZES

<b>Max. Length</b>		Unlimited		
<b>Min. Dimensions (Width x Height x Length)</b>	<b>mm/inch</b>	100 x 18 x 600	$3\frac{15}{16}'' \times 11\frac{1}{16}'' \times 23\frac{5}{8}''$	* With Short Part Nail

### CONVEYOR BELT'S FEATURES

<b>Useful Length</b>	<b>mm/inch</b>	1924	$75\frac{3}{4}''$	
<b>Total Length</b>	<b>mm/inch</b>	2000	$78\frac{3}{4}''$	
<b>Working Height</b>	<b>mm/inch</b>	915	$36''$	
<b>Electric Motor Power</b>	<b>kW</b>	0,55		
<b>Max. Conveyor Speed</b>	<b>meter/min.</b>	12		
<b>Max. Load Capacity</b>	<b>kgs/meter</b>	100		

### STRETCH FILM FEATURES

<b>Max. Width</b>	<b>mm/inch</b>	200	$7\frac{7}{8}''$	
<b>Max. Diameter</b>	<b>mm/inch</b>	Ø230	$9\frac{1}{16}''$	(Max. Weight: 3 kg)
<b>Reel Core Diameter</b>	<b>mm/inch</b>	Ø76	$3''$	
<b>Recommended Thickness</b>	<b>micron</b>	23, 30, 35		


### MACHINE GENERAL FEATURES

<b>Main Motor Power</b>	<b>kW</b>	1,5		
<b>Max. Ring Rotation Speed</b>	<b>rpm</b>	85		
<b>Min. Ring Rotation Speed</b>	<b>rpm</b>	20		
<b>Standard Machine Dimensions (W X H X L)</b>	<b>mm/inch</b>	2191 x 2341 x 4271	$86\frac{1}{4}'' \times 92\frac{3}{16}'' \times 168\frac{1}{8}''$	
<b>Total Weight</b>	<b>kg</b>	980		

# SPINNER 1500 S

BEDROOM FURNITURE - BED BASES - MEMBRANE, ACRYLIC AND LACQUER PAINTED COVERS - BATHROOMS AND KITCHEN CABINETS - DOORS  
DOOR FRAMES AND MOULDINGS - LAMINATE FLOORING - SANDWICH PANELS - WOOD PANELS - ALUMINIUM, STEEL AND WOOD PROFILES AND PIPES  
PVC PROFILE PRODUCTS ETC.

Ask for details

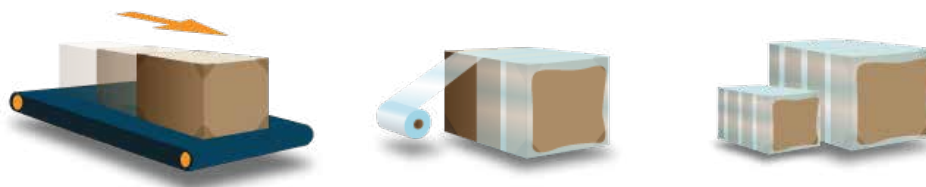

HORIZONTAL STRETCH FILM WRAPPING SERIES

## TECHNICAL FEATURES

### PRODUCT TO WRAP SIZES

Max. Length		Unlimited		
Min. Dimensions (Width x Height x Length)	mm/inch	200 x 18 x 600	$7\frac{7}{8}'' \times 11\frac{1}{16}'' \times 23\frac{5}{8}''$	* With Short Part Nail

### CONVEYOR BELT'S FEATURES

Useful Length	mm/inch	1924	$75\frac{3}{4}''$	
Total Length	mm/inch	2000	$78\frac{3}{4}''$	
Working Height	mm/inch	900	$35\frac{7}{16}''$	
Electric Motor Power	kW	0,55		
Max. Conveyor Speed	meter/min.	10		
Max. Load Capacity	kgs/meter	100		

### STRETCH FILM FEATURES

Max. Width	mm/inch	250	$9\frac{13}{16}''$	
Max. Diameter	mm/inch	Ø230	$9\frac{1}{16}''$	(Max. Weight: 4,5 kg)
Reel Core Diameter	mm/inch	Ø76	3"	
Recommended Thickness	micron	23, 30, 35		

### MACHINE GENERAL FEATURES

Main Motor Power	kW	2,2		
Max. Ring Rotation Speed	rpm	60		
Min. Ring Rotation Speed	rpm	15		
Standard Machine Dimensions (W X H X L)	mm/inch	2741 x 3062 x 4460	$107\frac{15}{16}'' \times 120\frac{2}{16}'' \times 107\frac{15}{16}'' \times 175\frac{9}{16}''$	
Total Weight	kg	1200		

# SPINNER 1800 S

SOFAS - PALLETS - BED BASES - BEDROOM AND KITCHEN CABINETS - SANDWICH PANELS - WOOD PANELS - ALUMINIUM, STEEL AND WOOD PROFILES AND PIPES - PVC PROFILE PRODUCTS ETC.

Ask for details



HORIZONTAL STRETCH FILM WRAPPING SERIES

## TECHNICAL FEATURES

### PRODUCT TO WRAP SIZES

<b>Max. Length</b>		Unlimited		
<b>Min. Dimensions (Width x Height x Length)</b>	<b>mm/inch</b>	700 x 200 x 1200	$27\frac{9}{16}'' \times 7\frac{7}{8}'' \times 47\frac{1}{4}''$	* With Short Part Nail

### CONVEYOR BELT'S FEATURES

<b>Useful Length</b>	<b>mm/inch</b>	2680	$105\frac{1}{2}''$	
<b>Total Length</b>	<b>mm/inch</b>	2910	$114\frac{9}{16}''$	
<b>Working Height</b>	<b>mm/inch</b>	950	$37\frac{3}{8}''$	
<b>Electric Motor Power</b>	<b>kW</b>	0,55		
<b>Max. Conveyor Speed</b>	<b>meter/min.</b>	12		
<b>Max. Load Capacity</b>	<b>kgs/meter</b>	100		

### STRETCH FILM FEATURES

<b>Max. Width</b>	<b>mm/inch</b>	250	$9\frac{13}{16}''$	
<b>Max. Diameter</b>	<b>mm/inch</b>	Ø230	$9\frac{1}{16}''$	(Max. Weight: 4,5 kg)
<b>Reel Core Diameter</b>	<b>mm/inch</b>	Ø76	3"	
<b>Recommended Thickness</b>	<b>micron</b>	23, 30, 35		


### MACHINE GENERAL FEATURES

<b>Main Motor Power</b>	<b>kW</b>	3		
<b>Max. Ring Rotation Speed</b>	<b>rpm</b>	50		
<b>Min. Ring Rotation Speed</b>	<b>rpm</b>	10		
<b>Standard Machine Dimensions (W X H X L)</b>	<b>mm/inch</b>	3051 x 2662 x 6266	$120\frac{1}{8}'' \times 104\frac{13}{16}'' \times 246\frac{11}{16}''$	
<b>Total Weight</b>	<b>kg</b>	1820		

# SPINNER 2200 S

SOFAS - PALLETS - BED BASES - BEDROOM AND KITCHEN CABINETS - SANDWICH PANELS - WOOD PANELS - ALUMINIUM, STEEL AND WOOD PROFILES AND PIPES - PVC PROFILE PRODUCTS ETC.

Ask for details

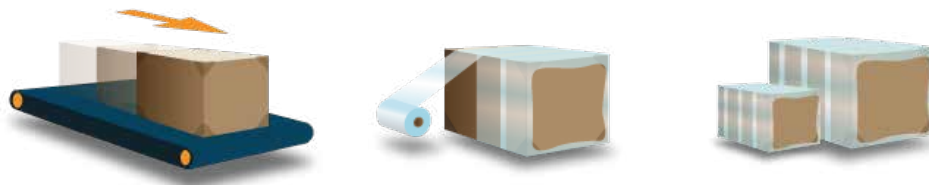

HORIZONTAL STRETCH FILM WRAPPING SERIES

## TECHNICAL FEATURES

### PRODUCT TO WRAP SIZES

<b>Max. Length</b>		Unlimited		
<b>Min. Dimensions (Width x Height x Length)</b>	<b>mm/inch</b>	700 x 400 x 2000	$27\frac{9}{16}$ " x $15\frac{3}{4}$ " x $78\frac{3}{4}$ "	* With Short Part Nail

### STRETCH FILM FEATURES

<b>Max. Width</b>	<b>mm/inch</b>	500	$19\frac{11}{16}$ "	
<b>Max. Diameter</b>	<b>mm/inch</b>	Ø230	$9\frac{1}{16}$ "	(Max. Weight: 9 kg)
<b>Reel Core Diameter</b>	<b>mm/inch</b>	Ø76	3"	
<b>Recommended Thickness</b>	<b>micron</b>	23, 30, 35		

### MACHINE GENERAL FEATURES

<b>Main Motor Power</b>	<b>kW</b>	4,5		
<b>Max. Ring Rotation Speed</b>	<b>rpm</b>	35		
<b>Min. Ring Rotation Speed</b>	<b>rpm</b>	10		
<b>Standard Machine Dimensions (W X H X L)</b>	<b>mm/inch</b>	3450 x 3100 x Depends to conveyor length	$135\frac{13}{16}$ " x $122\frac{1}{16}$ " x Depends to conveyor length	


### CONVEYOR BELT'S FEATURES

\*\*Customized on clients requests

# EASYWRAP 50

DOOR FRAMES AND MOULDINGS - LAMINATE FLOORING - ALUMINIUM, STEEL AND WOOD PROFILES AND PIPES- PVC PROFILE PRODUCTS ETC.

Ask for details

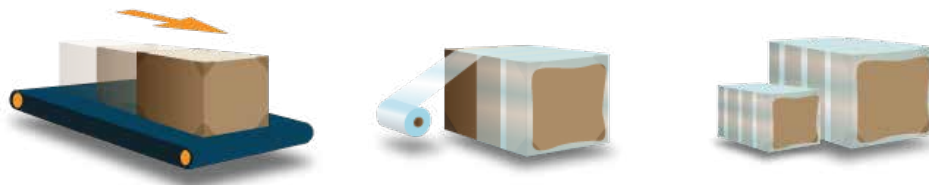

HORIZONTAL STRETCH FILM WRAPPING SERIES

## TECHNICAL FEATURES

### PRODUCT TO WRAP SIZES

<b>Max. Length</b>		Unlimited		
<b>Min. Dimensions (Width x Height x Length)</b>	<b>mm/inch</b>	100 x 20 x 500	$3\frac{15}{16}'' \times 13\frac{1}{16}'' \times 19\frac{11}{16}''$	* With Short Part Nail

### CONVEYOR BELT'S FEATURES

<b>Useful Length</b>	<b>mm/inch</b>	820	$32\frac{5}{16}''$	
<b>Total Length</b>	<b>mm/inch</b>	910	$35\frac{13}{16}''$	
<b>Working Height</b>	<b>mm/inch</b>	920	$36\frac{1}{4}''$	
<b>Electric Motor Power</b>	<b>kW</b>	0,55		
<b>Max. Conveyor Speed</b>	<b>meter/min.</b>	9		
<b>Max. Load Capacity</b>	<b>kgs/meter</b>	100		

### STRETCH FILM FEATURES

<b>Max. Width</b>	<b>mm/inch</b>	175	$6\frac{7}{8}''$	
<b>Max. Diameter</b>	<b>mm/inch</b>	Ø230	$9\frac{1}{16}''$	(Max Weight: 3 kg)
<b>Reel Core Diameter</b>	<b>mm/inch</b>	Ø76	3"	
<b>Recommended Thickness</b>	<b>micron</b>	23, 30, 35		

### MACHINE GENERAL FEATURES

<b>Main Motor Power</b>	<b>kW</b>	1,1		
<b>Max. Ring Rotation Speed</b>	<b>rpm</b>	180		
<b>Min. Ring Rotation Speed</b>	<b>rpm</b>	35		
<b>Standard Machine Dimensions (W X H X L)</b>	<b>mm/inch</b>	2136 x 2182 x 1255	$84\frac{1}{8}'' \times 85\frac{7}{8}'' \times 49\frac{7}{16}''$	
<b>Total Weight</b>	<b>kg</b>	650		

# EASYWRAP 100

MEMBRANE, ACRYLIC AND LACQUER PAINTED COVERS - BATHROOMS AND KITCHEN CABINETS - DOORS - DOOR FRAMES AND MOULDINGS  
LAMINATE FLOORING - ALUMINIUM, STEEL AND WOOD PROFILES AND PIPES- PVC PROFILE PRODUCTS ETC.

Ask for details



HORIZONTAL STRETCH FILM WRAPPING SERIES

## TECHNICAL FEATURES

### PRODUCT TO WRAP SIZES

<b>Max. Length</b>		Unlimited		
<b>Min. Dimensions (Width x Height x Length)</b>	<b>mm/inch</b>	200 x 20 x 500	$7\frac{7}{8}'' \times 1\frac{3}{16}'' \times 19\frac{11}{16}''$	* With Short Part Nail

### CONVEYOR BELT'S FEATURES

<b>Useful Length</b>	<b>mm/inch</b>	820	$32\frac{5}{16}''$	
<b>Total Length</b>	<b>mm/inch</b>	910	$35\frac{13}{16}''$	
<b>Working Height</b>	<b>mm/inch</b>	920	$36\frac{1}{4}''$	
<b>Electric Motor Power</b>	<b>kW</b>	0,55		
<b>Max. Conveyor Speed</b>	<b>meter/min.</b>	9		
<b>Max. Load Capacity</b>	<b>kgs/meter</b>	100		

### STRETCH FILM FEATURES

<b>Max. Width</b>	<b>mm/inch</b>	175	$6\frac{7}{8}''$	
<b>Max. Diameter</b>	<b>mm/inch</b>	Ø230	$9\frac{1}{16}''$	(Max Weight: 3 kg)
<b>Reel Core Diameter</b>	<b>mm/inch</b>	Ø76	3"	
<b>Recommended Thickness</b>	<b>micron</b>	23, 30, 35		



### MACHINE GENERAL FEATURES

<b>Main Motor Power</b>	<b>kW</b>	1,1		
<b>Max. Ring Rotation Speed</b>	<b>rpm</b>	110		
<b>Min. Ring Rotation Speed</b>	<b>rpm</b>	35		
<b>Standard Machine Dimensions (W X H X L)</b>	<b>mm/inch</b>	2136 x 2223 x 1755	$84\frac{1}{8}'' \times 87\frac{1}{2}'' \times 69\frac{1}{8}''$	
<b>Total Weight</b>	<b>kg</b>	790		

# EASYWRAP 150

BEDROOM FURNITURE - BED BASES - MEMBRANE, ACRYLIC AND LACQUER PAINTED COVERS - BATHROOMS AND KITCHEN CABINETS - DOORS  
DOOR FRAMES AND MOULDINGS - LAMINATE FLOORING - SANDWICH PANELS - WOOD PANELS - ALUMINIUM, STEEL AND WOOD PROFILES AND PIPES  
PVC PROFILE PRODUCTS ETC.

Ask for details

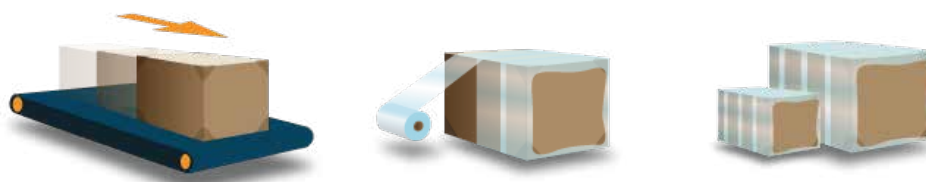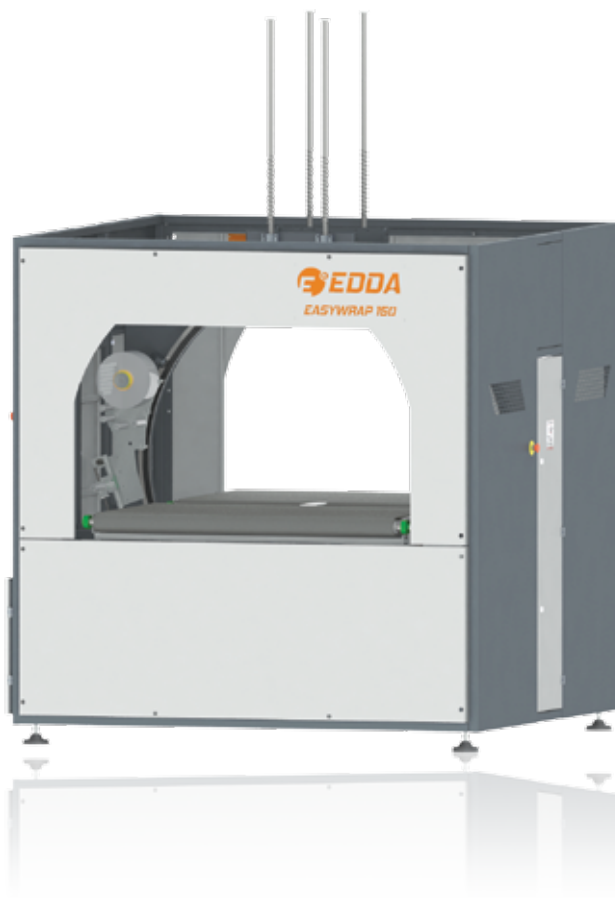

HORIZONTAL STRETCH FILM WRAPPING SERIES

## TECHNICAL FEATURES

### PRODUCT TO WRAP SIZES

<b>Max. Length</b>		Unlimited	
<b>Min. Dimensions (Width x Height x Length)</b>	<b>mm/inch</b>	250 x 40 x 600	$9\frac{13}{16}'' \times 1\frac{9}{16}'' \times 23\frac{5}{8}''$ * With Short Part Nail

### CONVEYOR BELT'S FEATURES

<b>Useful Length</b>	<b>mm/inch</b>	820	$32\frac{5}{16}''$
<b>Total Length</b>	<b>mm/inch</b>	910	$35\frac{13}{16}''$
<b>Working Height</b>	<b>mm/inch</b>	1020	$40\frac{3}{16}''$
<b>Electric Motor Power</b>	<b>kW</b>	0,55	
<b>Max. Conveyor Speed</b>	<b>meter/min.</b>	9	
<b>Max. Load Capacity</b>	<b>kgs/meter</b>	100	

### STRETCH FILM FEATURES

<b>Max. Width</b>	<b>mm/inch</b>	175	$6\frac{7}{8}''$
<b>Max. Diameter</b>	<b>mm/inch</b>	Ø230	$9\frac{1}{16}''$ (Max Weight: 3 kg)
<b>Reel Core Diameter</b>	<b>mm/inch</b>	Ø76	3"
<b>Recommended Thickness</b>	<b>micron</b>	23, 30, 35	

### MACHINE GENERAL FEATURES

<b>Main Motor Power</b>	<b>kW</b>	1,1	
<b>Max. Ring Rotation Speed</b>	<b>rpm</b>	50	
<b>Min. Ring Rotation Speed</b>	<b>rpm</b>	10	
<b>Standard Machine Dimensions (W X H X L)</b>	<b>mm/inch</b>	2136 x 3171 x 2230	$84\frac{1}{8}'' \times 124\frac{13}{16}'' \times 87\frac{13}{16}''$
<b>Total Weight</b>	<b>kg</b>	1080	

# SPEEDWRAP 550

ALUMINIUM, STEEL AND WOOD PROFILES AND PIPES - PVC PROFILE PRODUCTS ETC.

Ask for details



HORIZONTAL STRETCH FILM WRAPPING SERIES

## TECHNICAL FEATURES

### PRODUCT TO WRAP SIZES

Max. Length		Unlimited	
Max. Width x Max. Height	mm/inch	260 x 270	$10\frac{1}{4}'' \times 10\frac{5}{8}''$
Min. Dimensions (Width x Height x Length)	mm/inch	70 x 18 x 1000	$2\frac{3}{4}'' \times 1\frac{1}{16}'' \times 39\frac{3}{8}''$

### CONVEYOR BELT'S FEATURES


Useful Length	mm/inch	950	$37\frac{3}{8}''$
Total Length	mm/inch	1050	$41\frac{5}{16}''$
Working Height	mm/inch	920	$36\frac{1}{4}''$
Electric Motor Power	kW	0,55	
Max. Conveyor Speed	meter/min.	36	
Max. Load Capacity	kgs/meter	100	

### STRETCH FILM FEATURES

Max. Width	mm/inch	175	$6\frac{7}{8}''$
Max. Diameter	mm/inch	Ø230	$9\frac{1}{16}''$ (Max Weight: 3 kg)
Reel Core Diameter	mm/inch	Ø76	3"
Recommended Thickness	micron	23, 30, 35	

### MACHINE GENERAL FEATURES

Main Motor Power	kW	1,1	
Max. Ring Rotation Speed	rpm	140	
Min. Ring Rotation Speed	rpm	30	
Standard Machine Dimensions (W X H X L)	mm/inch	1600 x 1664 x 2744	$63'' \times 65\frac{1}{2}'' \times 108\frac{1}{16}''$
Total Weight	kg	940	

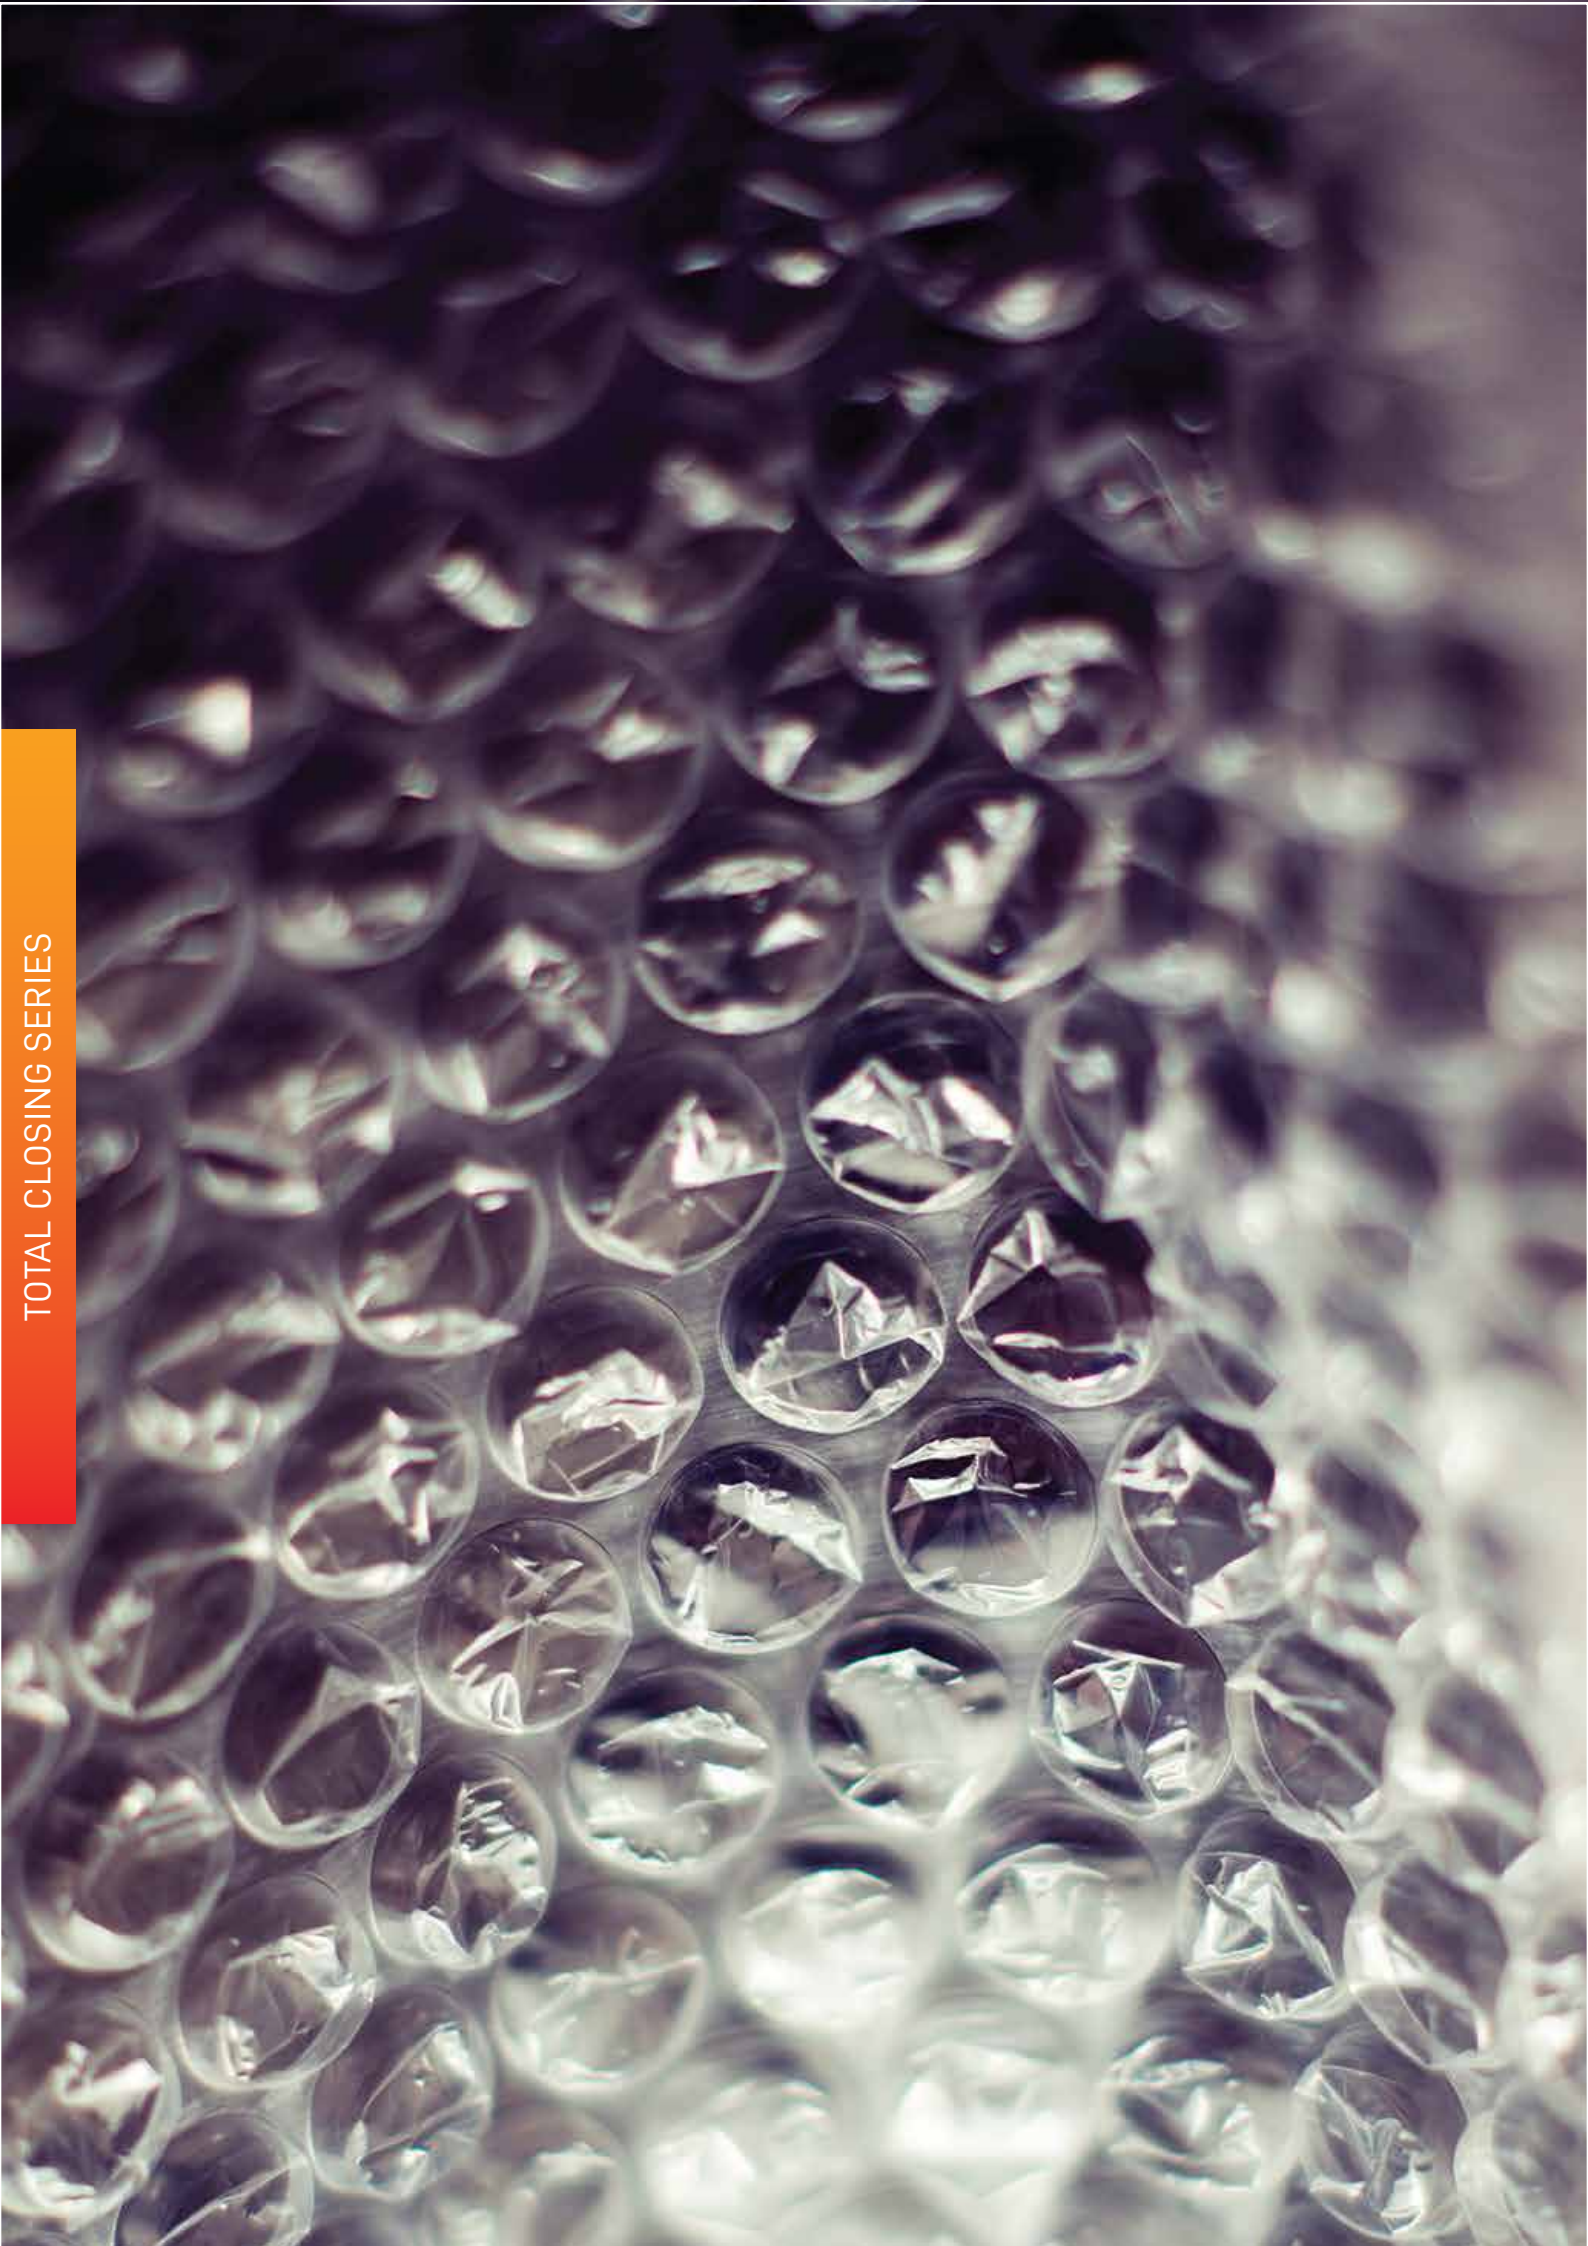

TOTAL CLOSING SERIES

# SPINNER 450 S BN

DOOR FRAMES AND MOULDINGS - LAMINATE FLOORING - ALUMINIUM, STEEL AND WOOD PROFILES AND PIPES  
PVC PROFILE PRODUCTS ETC.

Ask for details



TOTAL CLOSING SERIES

## TECHNICAL FEATURES


PRODUCT TO WRAP SIZES				AIR BUBBLE FILM UNIT			
Max. Length		Unlimited		Max. Film Width	mm/inch	450	17 11/16"
Min. Dimensions (Width x Height x Length)	mm/inch	100 x 18 x 600*	3 15/16" x 1 1/16" x 23 5/8"	Max. Film Reel Diameter	mm/inch	Ø500	19 11/16"
CONVEYOR BELT'S FEATURES				Reel Core Diameter	mm/inch	Ø20 ~ 76	13/16" ~ 3"
Useful Length	mm/inch	1820	71 5/8"	Suitable Film Materials	PE Film, PE Air Bubble Film, PVC Film		
Total Length	mm/inch	2000	78 3/4"	Cutting & Welding System			
Working Height	mm/inch	901	35 1/2"	Operating Temperature	°C	50 ~ 150	
Electric Motor Power	kW	0,55					
Max. Conveyor Speed	meter/min.	15					
Max. Load Capacity	kgs/meter	100					
STRETCH FILM FEATURES							
Max. Width	mm/inch	200	7 7/8"				
Max. Diameter	mm/inch	Ø230	9 1/16"				(Max. Weight: 3 kg)
Reel Core Diameter	mm/inch	Ø76	3"				
Recommended Thickness	micron	23, 30, 35					
MACHINE GENERAL FEATURES							
Main Motor Power	kW	1,1					
Max. Ring Rotation Speed	rpm	160					
Min. Ring Rotation Speed	rpm	40					
Total Power	kW	2,95					
Standard Machine Dimensions (W X H X L)	mm/inch	1571 x 2089 x 4195	61 7/8" x 82 1/4" x 165 3/16"				
Total Weight	kg	800					

\* With Short Part Nail

# SPINNER 1000 S BN

MEMBRANE, ACRYLIC AND LACQUER PAINTED COVERS - BATHROOMS AND KITCHEN CABINETS - DOORS - DOOR FRAMES AND MOULDINGS  
LAMINATE FLOORING - ALUMINIUM, STEEL AND WOOD PROFILES AND PIPES- PVC PROFILE PRODUCTS ETC.

Ask for details

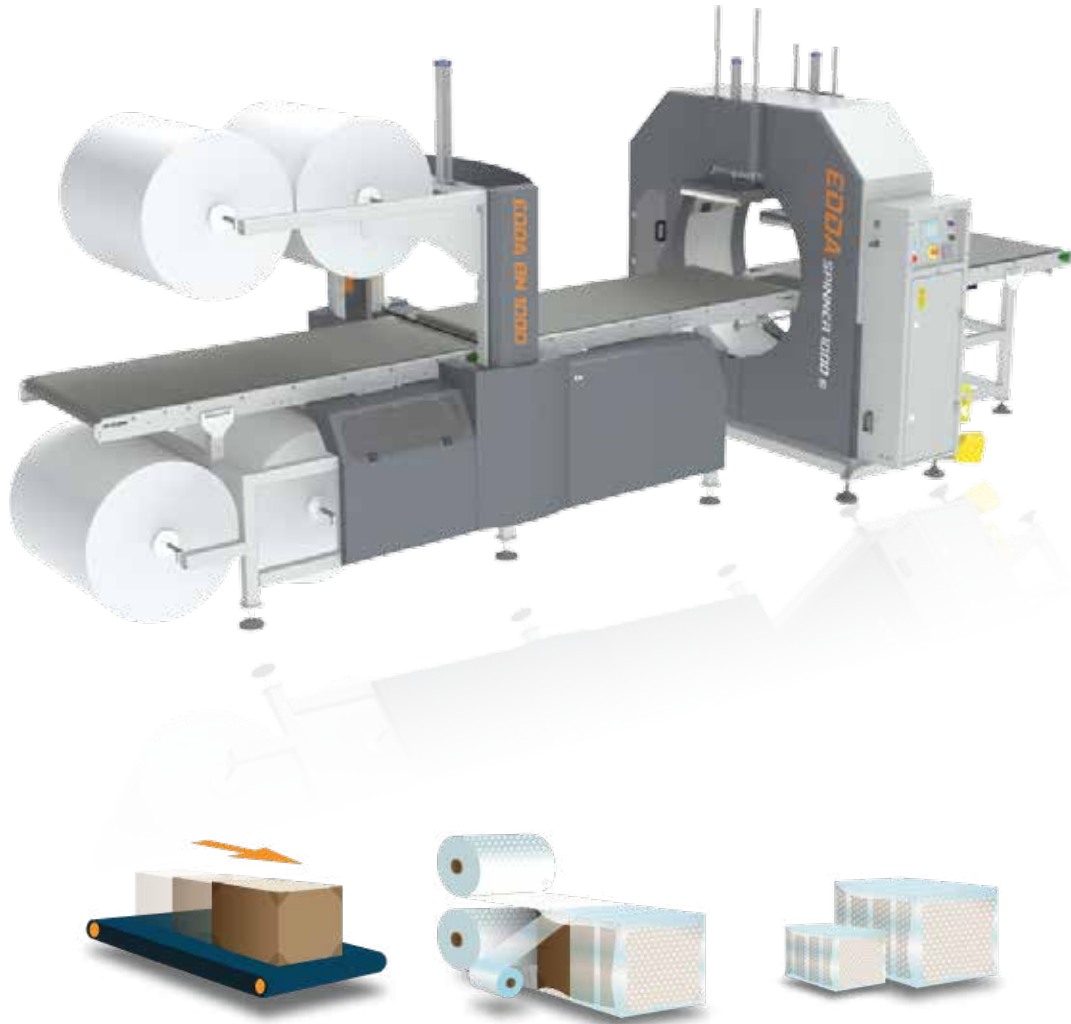

TOTAL CLOSING SERIES

## TECHNICAL FEATURES


PRODUCT TO WRAP SIZES			AIR BUBBLE FILM UNIT		
Max. Length		Unlimited	Max. Film Width	mm/inch	800 / 31 1/2"
Min. Dimensions (Width x Height x Length)	mm/inch	100 x 18 x 600*	Max. Film Reel Diameter	mm/inch	Ø600 / 23 5/8"
CONVEYOR BELT'S FEATURES			Reel Core Diameter	mm/inch	Ø20 ~ 76 / 13/16" ~ 3"
Useful Length	mm/inch	1924 / 75 3/4"	Suitable Film Materials	PE Film, PE Air Bubble Film, PVC Film	
Total Length	mm/inch	2000 / 78 3/4"	Cutting & Welding System		
Working Height	mm/inch	915 / 36"	Operating Temperature	°C	50 ~ 150
Electric Motor Power	kW	0,55			
Max. Conveyor Speed	meter/min.	12			
Max. Load Capacity	kgs/meter	100			
STRETCH FILM FEATURES					
Max. Width	mm/inch	200 / 7 7/8"			
Max. Diameter	mm/inch	Ø230 / 9 1/16"	(Max. Weight: 3 kg)		
Reel Core Diameter	mm/inch	Ø76 / 3"			
Recommended Thickness	micron	23, 30, 35			
MACHINE GENERAL FEATURES					
Main Motor Power	kW	1,5			
Max. Ring Rotation Speed	rpm	85			
Min. Ring Rotation Speed	rpm	20			
Total Power	kW	3,75			
Standard Machine Dimensions (W X H X L)	mm/inch	2191 x 2441 x 6362 / 86 1/4" x 96 1/8" x 250 1/2"			
Total Weight	kg	1320			

\* With Short Part Nail

# SPINNER 1500 S BN

BEDROOM FURNITURE - BED BASES - MEMBRANE, ACRYLIC AND LACQUER PAINTED COVERS - BATHROOMS AND KITCHEN CABINETS - DOORS  
DOOR FRAMES AND MOULDINGS - LAMINATE FLOORING - SANDWICH PANELS - WOOD PANELS - ALUMINIUM, STEEL AND WOOD PROFILES AND PIPES  
PVC PROFILE PRODUCTS ETC.

Ask for details

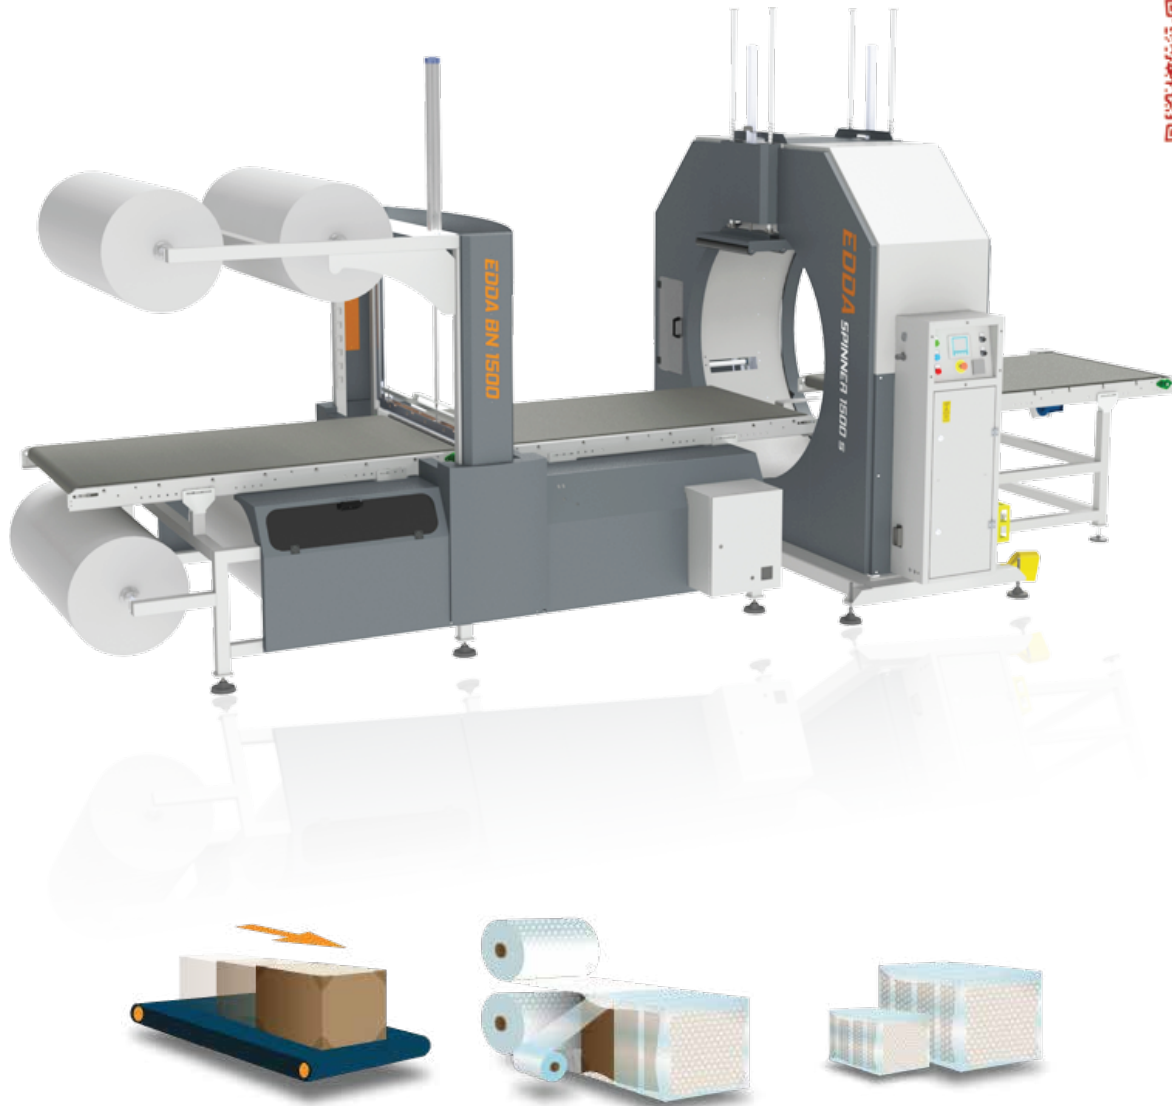

TOTAL CLOSING SERIES


## TECHNICAL FEATURES

PRODUCT TO WRAP SIZES			AIR BUBBLE FILM UNIT		
Max. Length		Unlimited	Max. Film Width	mm/inch	1350 / 53 1/8"
Min. Dimensions (Width x Height x Length)	mm/inch	200 x 18 x 600*	Max. Film Reel Diameter	mm/inch	Ø600 / 23 5/8"
CONVEYOR BELT'S FEATURES			Reel Core Diameter	mm/inch	Ø20 ~ 76 / 3/16" ~ 3"
Useful Length	mm/inch	1924 / 75 3/4"	Suitable Film Materials	PE Film, PE Air Bubble Film, PVC Film	
Total Length	mm/inch	2000 / 78 3/4"	Cutting & Welding System		
Working Height	mm/inch	900 / 35 7/16"	Operating Temperature	°C	50 ~ 150
Electric Motor Power	kW	0,55			
Max. Conveyor Speed	meter/min.	10			
Max. Load Capacity	kgs/meter	150			
STRETCH FILM FEATURES					
Max. Width	mm/inch	250 / 9 13/16"			
Max. Diameter	mm/inch	Ø230 / 9 1/16"	(Max. Weight: 3 kg)		
Reel Core Diameter	mm/inch	Ø76 / 3"			
Recommended Thickness	micron	23, 30, 35			
MACHINE GENERAL FEATURES					
Main Motor Power	kW	2,2			
Max. Ring Rotation Speed	rpm	60			
Min. Ring Rotation Speed	rpm	15			
Total Power	kW	5,4			
Standard Machine Dimensions (W X H X L)	mm/inch	2741 x 2882 x 6532 / 107 15/16" x 113 13/16" x 257 3/16"			
Total Weight	kg	1700			

\* With Short Part Nail

# SPINNER 1800 S BN

SOFAS - PALLETS - BED BASES - BEDROOM AND KITCHEN CABINETS - SANDWICH PANELS - WOOD PANELS - ALUMINIUM, STEEL AND WOOD PROFILES AND PIPES - PVC PROFILE PRODUCTS ETC.

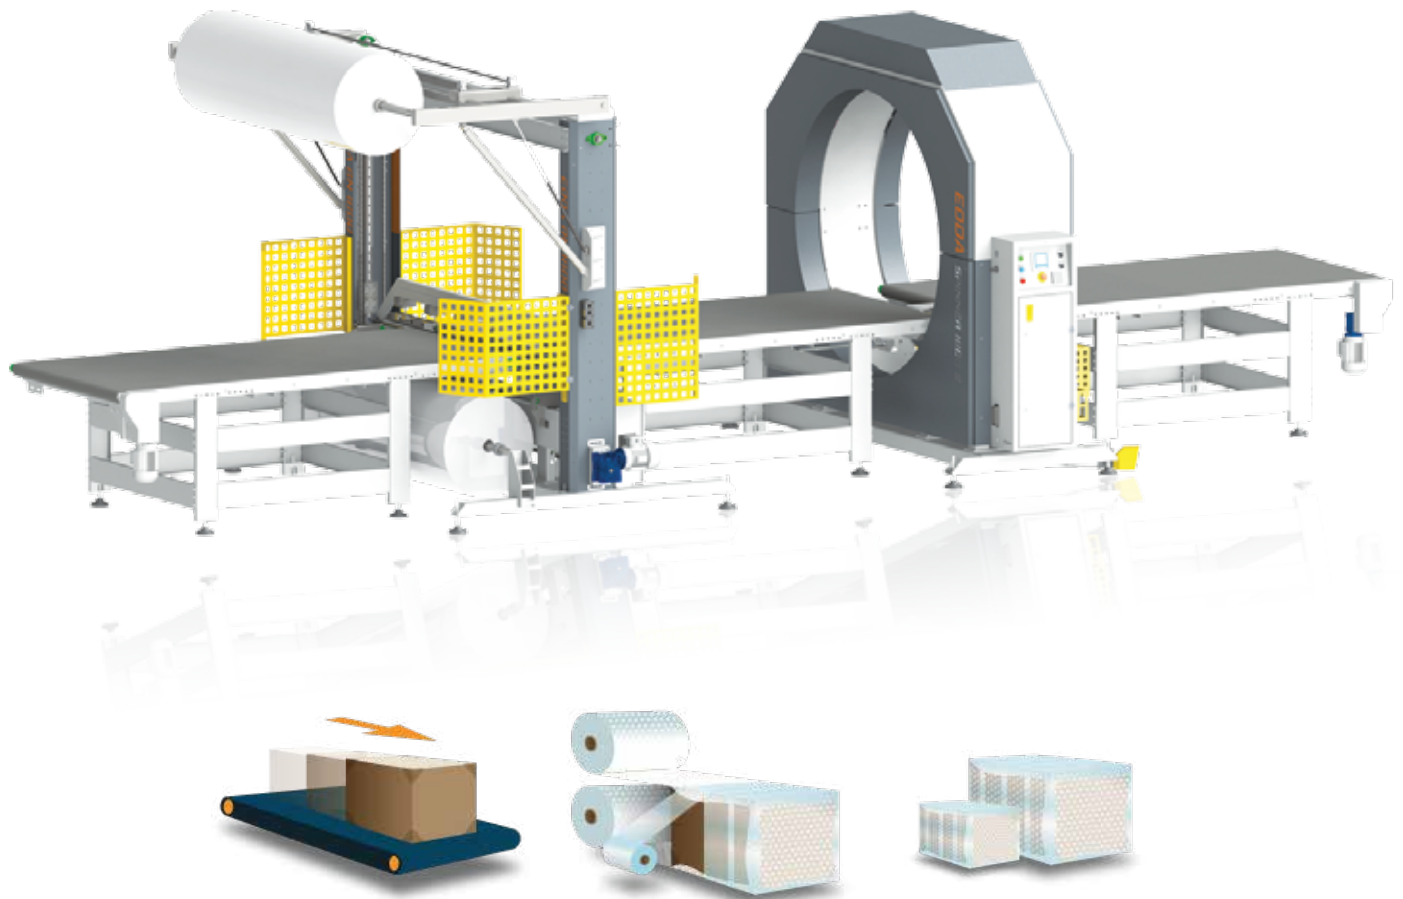

TOTAL CLOSING SERIES

## TECHNICAL FEATURES

### PRODUCT TO WRAP SIZES

<b>Max. Length</b>		Unlimited	
<b>Min. Dimensions (Width x Height x Length)</b>	<b>mm/inch</b>	700 x 200 x 1200*	$27\frac{9}{16}'' \times 7\frac{7}{8}'' \times 47\frac{1}{4}''$


### CONVEYOR BELT'S FEATURES

<b>Useful Length</b>	<b>mm/inch</b>	2680	$105\frac{1}{2}''$
<b>Total Length</b>	<b>mm/inch</b>	2910	$114\frac{9}{16}''$
<b>Working Height</b>	<b>mm/inch</b>	950	$37\frac{3}{8}''$
<b>Electric Motor Power</b>	<b>kW</b>	0,55	
<b>Max. Conveyor Speed</b>	<b>meter/min.</b>	12	
<b>Max. Load Capacity</b>	<b>kgs/meter</b>	100	


### STRETCH FILM FEATURES

<b>Max. Width</b>	<b>mm/inch</b>	250	$9\frac{13}{16}''$
<b>Max. Diameter</b>	<b>mm/inch</b>	Ø230	$9\frac{1}{16}''$ (Max. Weight: 4,5 kg)
<b>Reel Core Diameter</b>	<b>mm/inch</b>	Ø76	3"
<b>Recommended Thickness</b>	<b>micron</b>	23, 30, 35	

Ask for details

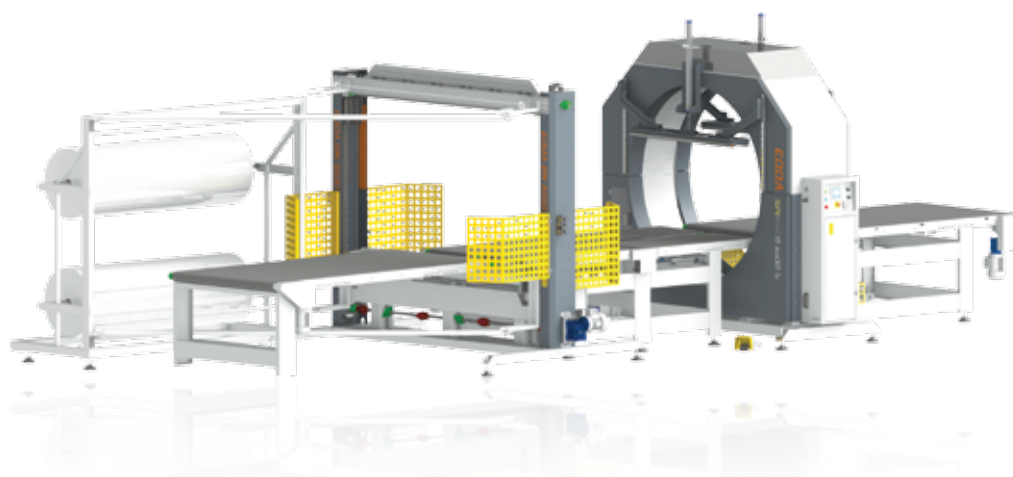

CROSS ROTATING LIFTER OPTION

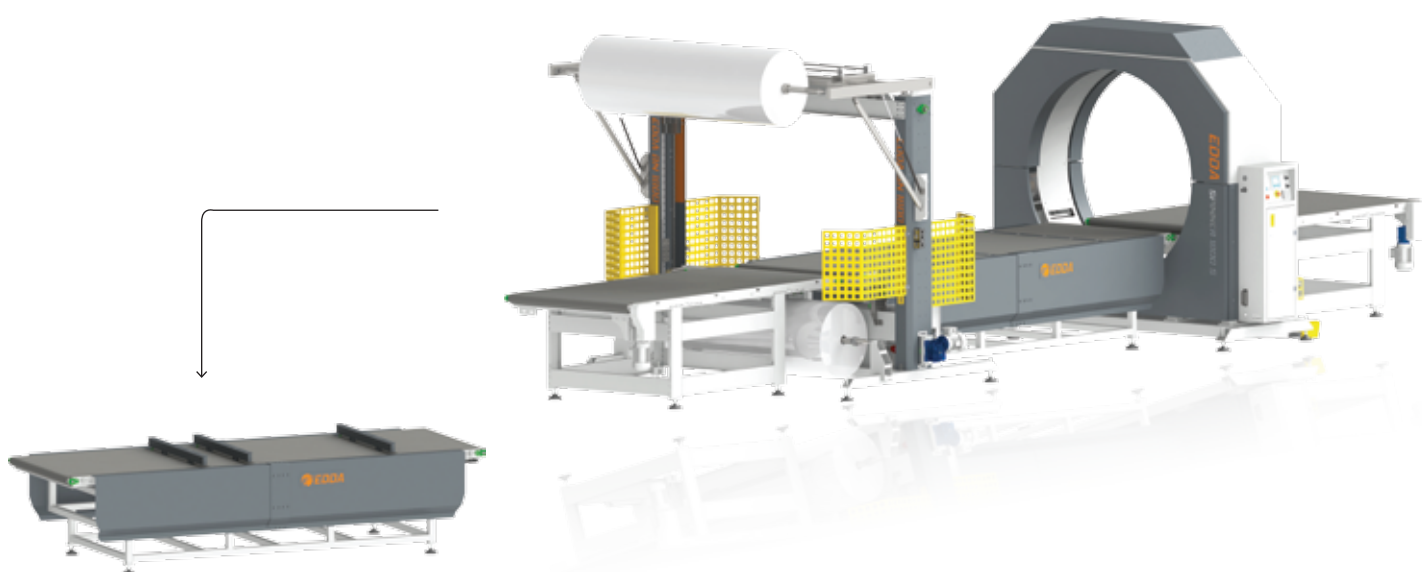

PARALLEL LIFTER OPTION

#### AIR BUBBLE FILM UNIT

Max. Film Width	mm/inch	2000	78 3/4"
Max. Film Reel Diameter	mm/inch	Ø650	25 5/16"
Reel Core Diameter	mm/inch	Ø20 ~ 76	13/16" ~ 3"
Suitable Film Materials		PE Film, PE Air Bubble Film, PVC Film	
Cutting & Welding System Operating Temperature	°C	50 ~ 150	

#### MACHINE GENERAL FEATURES

Main Motor Power	kW	3	
Max. Ring Rotation Speed	rpm	50	
Min. Ring Rotation Speed	rpm	10	
Total Power	kW	8,35	
Standard Machine Dimensions (W X H X L)	mm/inch	3242 x 3009 x 9191	127 5/8" x 118 7/16" x 361 7/8"
Total Weight	kg	2600	

\* With Short Part Nail



SHRINK WRAP SERIES

**WATER**

**WATER**

**WA**

# SHRINK WRAP

FOOD – BEVERAGE – CONSUMER GOODS

Ask for details



SHRINK WRAP SERIES

## TECHNICAL FEATURES

Machine Size (L x W x H)	mm/inch	1800 x 1080 x 1315 (3900 x 1080 x 1315)	$70\frac{7}{8}'' \times 42\frac{1}{2}'' \times 51\frac{3}{4}''$ ( $153\frac{9}{16}'' \times 42\frac{1}{2}'' \times 51\frac{3}{4}''$ )
Packing Size (L x W x H)	mm/inch	(100~450) x (60~350) x (5~120)	$3\frac{15}{16}'' \sim 70\frac{7}{8}'' \times 2\frac{3}{8}'' \sim 13\frac{3}{4}'' \times 3\frac{3}{16}'' \sim 4\frac{3}{4}''$
Sealing Bars Size (L x H)	mm/inch	565 x 460	$22\frac{1}{4}'' \times 18\frac{1}{8}''$
Packing Film (Max.)	mm/inch	550	$21\frac{5}{8}''$
Packing Capacity	pcs/min	30	
Conveyor Speed		26	
Film Type		Pof, Pe	
Sealing Blade Temperature	°C	180 - 230	
Voltage		230 V / 1 P 3	
Motor Power	W	320	
Electric Power	kW	2,5	
Weight	kg	330	

VERTICAL STRETCH FILM SERIES





VERTICAL STRETCH FILM SERIES

# WRAPTOR 1500 / 1650

# H: 2200

PALLETS - BOXES



Ask for details



PRE-STRETCH SYSTEM



MECHANICAL BRAKE SYSTEM

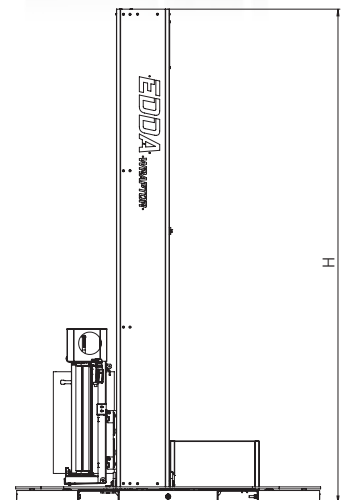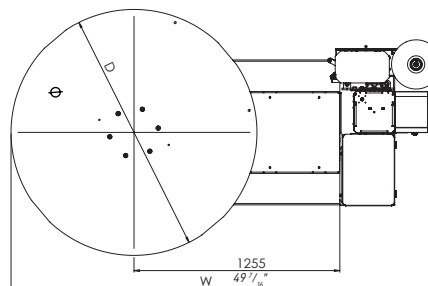

VERTICAL STRETCH FILM SERIES



TECHNICAL FEATURES	WRAPTOR 1500 MB 2200		WRAPTOR 1500 VPT 2200		WRAPTOR 1650 MB 2200		WRAPTOR 1650 VPT 2200	
	Table Diameter	mm/inch	Ø1500 59 1/16"	Ø1500 59 1/16"	Ø1650 64 15/16"	Ø1650 64 15/16"	Ø1650 64 15/16"	Ø1650 64 15/16"
Table Turning Speed	rpm	4 - 12	4 - 12	2 - 10	2 - 10	2 - 10	2 - 10	
Forklift Lifting Place		Front - Back	Front - Back	Front - Back	Front - Back	Front - Back	Front - Back	
Voltage	Volt	220 V AC	220 V AC	220 V AC	220 V AC	220 V AC	220 V AC	
Total Power	kW	0,8	1	0,8	1	0,8	1	
Tensioning System		Mechanical Brake	Motorized Pre-Stretching	Mechanical Brake	Motorized Pre-Stretching	Mechanical Brake	Motorized Pre-Stretching	
Tensioning Rate	[%]	0 - 100	0 - 250	0 - 100	0 - 250	0 - 100	0 - 250	
Speed Adjustment		Available	Available	Available	Available	Available	Available	
FILM ROLL FEATURES								
Film Width	mm/inch	200 - 500 7 7/8" - 19 11/16"	500 19 11/16"	200 - 500 7 7/8" - 19 11/16"	500 19 11/16"	200 - 500 7 7/8" - 19 11/16"	500 19 11/16"	
Max. Roll Diameter	mm/inch	Ø250 9 13/16"	Ø250 9 13/16"	Ø250 9 13/16"	Ø250 9 13/16"	Ø250 9 13/16"	Ø250 9 13/16"	
Max. Roll Weight	kg	16	16	16	16	16	16	
Roll Inner Diameter	mm/inch	Ø76 3"	Ø76 3"	Ø76 3"	Ø76 3"	Ø76 3"	Ø76 3"	
PACKAGING PRODUCT DIMENSIONS								
Max. Dimensions (W x D)	mm/inch	1200 x 1000 47 1/4" x 39 3/8"	1200 x 1000 47 1/4" x 39 3/8"	1300 x 1100 51 3/16" x 39 3/8"	1300 x 1100 51 3/16" x 39 3/8"	1300 x 1100 51 3/16" x 39 3/8"	1300 x 1100 51 3/16" x 39 3/8"	
Max. Height	mm/inch	2200 86 5/8"	2200 86 5/8"	2200 86 5/8"	2200 86 5/8"	2200 86 5/8"	2200 86 5/8"	
Loading Capacity	kg	1500	1500	2000	2000	2000	2000	
MACHINE DIMENSIONS								
Height	mm/inch	2430 95 11/16"	2430 95 11/16"	2430 95 11/16"	2430 95 11/16"	2430 95 11/16"	2430 95 11/16"	
Width	mm/inch	1500 59 1/16"	1500 59 1/16"	1650 64 15/16"	1650 64 15/16"	1650 64 15/16"	1650 64 15/16"	
Depth	mm/inch	2580 101 9/16"	2580 101 9/16"	2660 104 3/4"	2660 104 3/4"	2660 104 3/4"	2660 104 3/4"	

# WRAPTOR 1500 / 1650

# H: 2700

PALLETS - BOXES

Ask for details

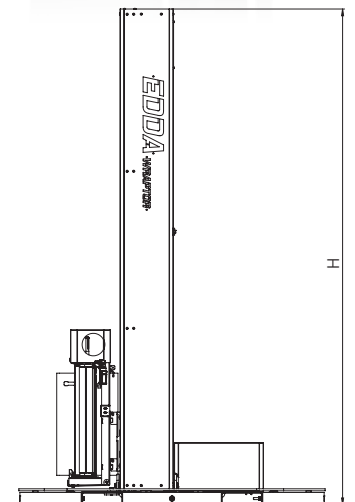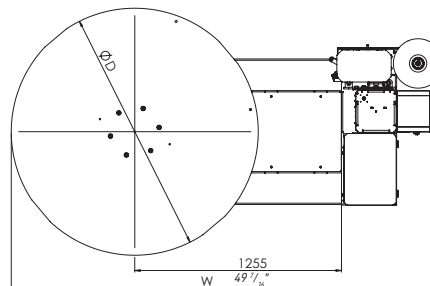

VERTICAL STRETCH FILM SERIES

TECHNICAL FEATURES	WRAPTOR 1500 MB 2700		WRAPTOR 1500 VPT 2700		WRAPTOR 1650 MB 2700		WRAPTOR 1650 VPT 2700	
	mm/inch		mm/inch		mm/inch		mm/inch	
Table Diameter		Ø1500 $59\frac{1}{16}$ "	Ø1500 $59\frac{1}{16}$ "		Ø1650 $64\frac{15}{16}$ "	Ø1650 $64\frac{15}{16}$ "		
Table Turning Speed	rpm	4 - 12	4 - 12		2 - 10	2 - 10		
Forklift Lifting Place		Front - Back	Front - Back		Front - Back	Front - Back		
Voltage	Volt	220 V AC	220 V AC		220 V AC	220 V AC		
Total Power	kW	0,8	1		0,8	1		
Tensioning System		Mechanical Brake	Motorized Pre-Stretching		Mechanical Brake	Motorized Pre-Stretching		
Tensioning Rate	[%]	0 - 100	0 - 250		0 - 100	0 - 250		
Speed Adjustment		Available	Available		Available	Available		
<b>FILM ROLL FEATURES</b>								
Film Width	mm/inch	200 - 500 $7\frac{7}{8}$ " - $19\frac{11}{16}$ "	500 $19\frac{11}{16}$ "		200 - 500 $7\frac{7}{8}$ " - $19\frac{11}{16}$ "	500 $19\frac{11}{16}$ "		
Max. Roll Diameter	mm/inch	Ø250 $9\frac{13}{16}$ "	Ø250 $9\frac{13}{16}$ "		Ø250 $9\frac{13}{16}$ "	Ø250 $9\frac{13}{16}$ "		
Max. Roll Weight	kg	16	16		16	16		
Roll Inner Diameter	mm/inch	Ø76 3"	Ø76 3"		Ø76 3"	Ø76 3"		
<b>PACKAGING PRODUCT DIMENSIONS</b>								
Max. Dimensions (W x D)	mm/inch	1200 x 1000 $47\frac{1}{4}$ " x $39\frac{3}{8}$ "	1200 x 1000 $47\frac{1}{4}$ " x $39\frac{3}{8}$ "		1300 x 1100 $51\frac{3}{16}$ " x $39\frac{3}{8}$ "	1300 x 1100 $51\frac{3}{16}$ " x $39\frac{3}{8}$ "		
Max. Height	mm/inch	2700 $106\frac{5}{16}$ "	2700 $106\frac{5}{16}$ "		2700 $106\frac{5}{16}$ "	2700 $106\frac{5}{16}$ "		
Loading Capacity	kg	1500	1500		2000	2000		
<b>MACHINE DIMENSIONS</b>								
Height	mm/inch	2930 $115\frac{3}{8}$ "	2930 $115\frac{3}{8}$ "		2930 $115\frac{3}{8}$ "	2930 $115\frac{3}{8}$ "		
Width	mm/inch	1500 $59\frac{1}{16}$ "	1500 $59\frac{1}{16}$ "		1650 $64\frac{15}{16}$ "	1650 $64\frac{15}{16}$ "		
Depth	mm/inch	2580 $101\frac{9}{16}$ "	2580 $101\frac{9}{16}$ "		2660 $104\frac{3}{4}$ "	2660 $104\frac{3}{4}$ "		

# WRAPTOR TP 1500 / TP 1650

# H: 2200

WINDOWS - DOORS - PALLETS - BOXES



Ask for details



PRE-STRETCH SYSTEM



MECHANICAL BRAKE SYSTEM

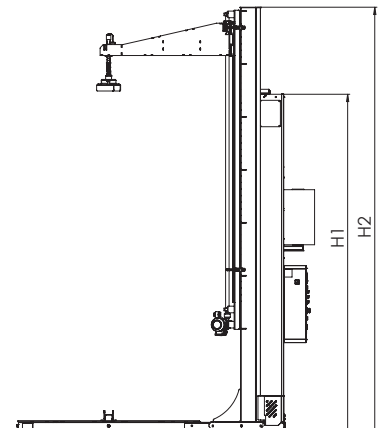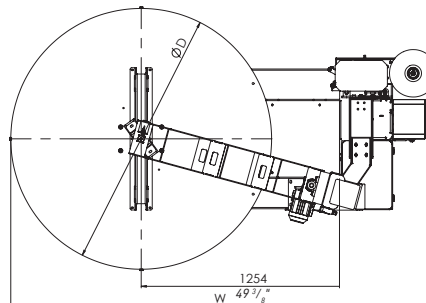

VERTICAL STRETCH FILM SERIES



TECHNICAL FEATURES		WRAPTOR TP 1500 MB 2200		WRAPTOR TP 1500 VPT 2200		WRAPTOR TP 1650 MB 2200		WRAPTOR TP 1650 VPT 2200	
Table Diameter	mm/inch	Ø1500	59 1/16"	Ø1500	59 1/16"	Ø1650	64 15/16"	Ø1650	64 15/16"
Table Turning Speed	rpm	4 - 12		4 - 12		2 - 10		2 - 10	
Forklift Lifting Place		Front - Back		Front - Back		Front - Back		Front - Back	
Voltage	Volt	220 V AC		220 V AC		220 V AC		220 V AC	
Total Power	kW	1		1,2		1		1,2	
Tensioning System		Mechanical Brake		Motorized Pre-Stretching		Mechanical Brake		Motorized Pre-Stretching	
Tensioning Rate	[%]	0 - 100		0 - 250		0 - 100		0 - 250	
Speed Adjustment		Available		Available		Available		Available	
FILM ROLL FEATURES									
Film Width	mm/inch	200 - 500	7 7/8" - 19 11/16"	500	19 11/16"	200 - 500	7 7/8" - 19 11/16"	500	19 11/16"
Max. Roll Diameter	mm/inch	Ø250	9 13/16"	Ø250	9 13/16"	Ø250	9 13/16"	Ø250	9 13/16"
Max. Roll Weight	kg	16		16		16		16	
Roll Inner Diameter	mm/inch	Ø76	3"	Ø76	3"	Ø76	3"	Ø76	3"
PACKAGING PRODUCT DIMENSIONS									
Max. Dimensions (W x D)	mm/inch	1200 x 1000	47 1/4" x 39 3/8"	1200 x 1000	47 1/4" x 39 3/8"	1300 x 1100	51 3/16" x 39 3/8"	1300 x 1100	51 3/16" x 39 3/8"
Max. Height	mm/inch	2200	86 5/8"	2200	86 5/8"	2200	86 5/8"	2200	86 5/8"
Loading Capacity	kg	1500		1500		2000		2000	
MACHINE DIMENSIONS									
Height	mm/inch	3050	120 1/16"	3050	120 1/16"	3050	120 1/16"	3050	120 1/16"
Width	mm/inch	1500	59 1/16"	1500	59 1/16"	1650	64 15/16"	1650	64 15/16"
Depth	mm/inch	2580	101 9/16"	2580	101 9/16"	2660	104 3/4"	2660	104 3/4"

# WRAPTOR TP 1500 / TP 1650

# H: 2700

WINDOWS - DOORS - PALLETS - BOXES

Ask for details

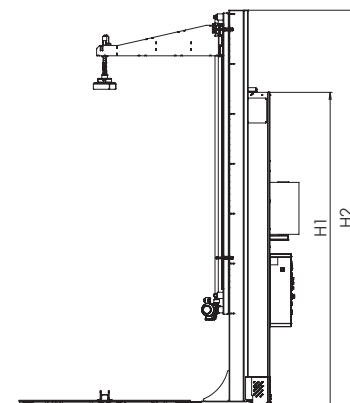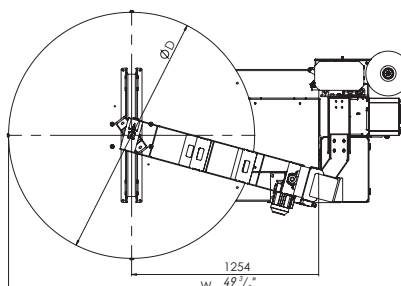

VERTICAL STRETCH FILM SERIES

TECHNICAL FEATURES	WRAPTOR TP 1500 MB 2700		WRAPTOR TP 1500 VPT 2700		WRAPTOR TP 1650 MB 2700		WRAPTOR TP 1650 VPT 2700	
	mm/inch		mm/inch		mm/inch		mm/inch	
Table Diameter	mm/inch	Ø1500 59 1/16"	Ø1500 59 1/16"		Ø1650 64 15/16"		Ø1650 64 15/16"	
Table Turning Speed	rpm	4 - 12	4 - 12		2 - 10		2 - 10	
Forklift Lifting Place		Front - Back	Front - Back		Front - Back		Front - Back	
Voltage	Volt	220 V AC	220 V AC		220 V AC		220 V AC	
Total Power	kW	1	1,2		1		1,2	
Tensioning System		Mechanical Brake	Motorized Pre-Stretching		Mechanical Brake		Motorized Pre-Stretching	
Tensioning Rate	[%]	0 - 100	0 - 250		0 - 100		0 - 250	
Speed Adjustment		Available	Available		Available		Available	
<b>FILM ROLL FEATURES</b>								
Film Width	mm/inch	200 - 500 7 7/8" - 19 11/16"	500 19 11/16"		200 - 500 7 7/8" - 19 11/16"		500 19 11/16"	
Max. Roll Diameter	mm/inch	Ø250 9 13/16"	Ø250 9 13/16"		Ø250 9 13/16"		Ø250 9 13/16"	
Max. Roll Weight	kg	16	16		16		16	
Roll Inner Diameter	mm/inch	Ø76 3"	Ø76 3"		Ø76 3"		Ø76 3"	
<b>PACKAGING PRODUCT DIMENSIONS</b>								
Max. Dimensions (W x D)	mm/inch	1200 x 1000 47 1/4" x 39 3/8"	1200 x 1000 47 1/4" x 39 3/8"		1300 x 1100 51 3/16" x 39 3/8"		1300 x 1100 51 3/16" x 39 3/8"	
Max. Height	mm/inch	2700 106 5/16"	2700 106 5/16"		2700 106 5/16"		2700 106 5/16"	
Loading Capacity	kg	1500	1500		2000		2000	
<b>MACHINE DIMENSIONS</b>								
Height	mm/inch	3550 139 3/4"	3550 139 3/4"		3550 139 3/4"		3550 139 3/4"	
Width	mm/inch	1500 59 1/16"	1500 59 1/16"		1650 64 15/16"		1650 64 15/16"	
Depth	mm/inch	2580 101 9/16"	2580 101 9/16"		2660 104 3/4"		2660 104 3/4"	

# ROBOWRAP

OVERSIZED PALLETS - BIG BOXES - PALLETS

Ask for details





VERTICAL STRETCH FILM SERIES



PRE-STRETCH SYSTEM



MECHANICAL BRAKE SYSTEM

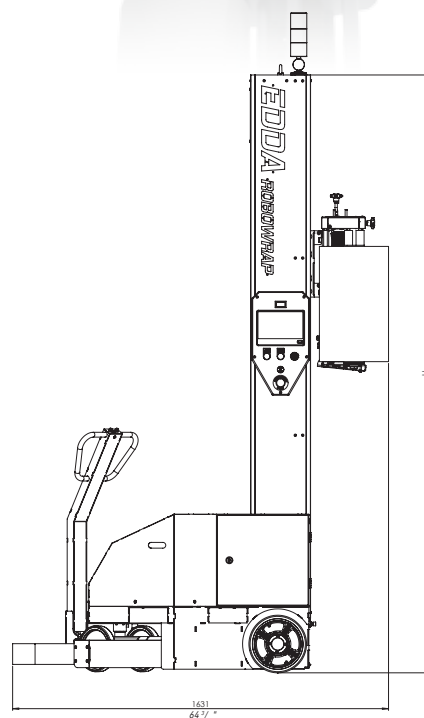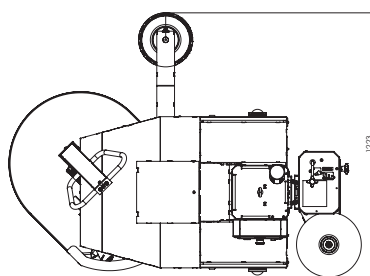

TECHNICAL FEATURES		ROBOWRAP 2200 MB		ROBOWRAP 2200 VPT		ROBOWRAP 2700 MB		ROBOWRAP 2700 VPT		
Machine Dimensions (L x W x H)	mm	1630 x 1230 x 2200		1630 x 1230 x 2200		1630 x 1230 x 2200		1630 x 1230 x 2200		
Control & Drive Voltage	V DC	24		24		24		24		
Charger Supply Voltage	V AC	220		220		220		220		
Film Tensioning System		Mechanical Brake		Motorized Pre-Stretching		Mechanical Brake		Motorized Pre-Stretching		
Film Tensioning Rate	[%]	0 - 100		0 - 250		0 - 100		0 - 250		
Speed Adjustment		Available		Available		Available		Available		
FILM ROLL FEATURES										
Film Width	mm/inch	200 - 500	7 7/8" - 19 11/16"	500	19 11/16"	200 - 500	7 7/8" - 19 11/16"	500	19 11/16"	
Max. Roll Diameter	mm/inch	Ø250	9 13/16"	Ø250	9 13/16"	Ø250	9 13/16"	Ø250	9 13/16"	
Max. Roll Weight	kg	16		16		16		16		
Roll Inner Diameter	mm/inch	Ø76	3"	Ø76	3"	Ø76	3"	Ø76	3"	
PACKAGING DIMENSIONS										
Max. Weight	mm/inch	2200	86 5/8"	2200	86 5/8"	2700	106 5/16"	2700	106 5/16"	
Max. Dimensions (W x D)	mm/inch	∞		∞		∞		∞		
Min. Dimensions (W x D)	mm/inch	700 x 700	27 9/16" x 27 9/16"	700 x 700	27 9/16" x 27 9/16"	700 x 700	27 9/16" x 27 9/16"	700 x 700	27 9/16" x 27 9/16"	



VERTICAL STRETCH FILM SERIES



TAPE WRAPPING

# TAPEMASTER

BOXES

Ask for details



TAPE WRAPPING


## TECHNICAL FEATURES

		M		L	
<b>PRODUCT TO TAPE DIMENSIONS</b>					
Max. Width x Height	mm/inch	980 x 260	$38 \frac{9}{16}'' \times 10 \frac{1}{4}''$	1270 x 320	$50'' \times 12 \frac{5}{8}''$
Min. Width x Height	mm/inch	350 x 50	$13 \frac{3}{4}'' \times 1 \frac{15}{16}''$	500 x 50	$19 \frac{11}{16}'' \times 1 \frac{15}{16}''$
Min. Length	mm/inch	400	$15 \frac{3}{4}''$	400	$15 \frac{3}{4}''$
<b>ROLLER TABLE'S FEATURES(INFEED &amp; OUTFEED)</b>					
Length	mm/inch	700	$27 \frac{9}{16}''$	700	$27 \frac{9}{16}''$
Working Height	mm/inch	1000	$39 \frac{3}{8}''$	1000	$39 \frac{3}{8}''$
Loading Capacity	kg	100		100	
<b>ADHESIVE TAPE FEATURES</b>					
Tape Width	mm/inch	45 - 65	$1 \frac{3}{4}'' - 2 \frac{9}{16}''$	45 - 65	$1 \frac{3}{4}'' - 2 \frac{9}{16}''$
Max. Tape Roll Diameter	mm/inch	Ø250	$9 \frac{13}{16}''$	Ø250	$9 \frac{13}{16}''$
Tape Roll Core Diameter	mm/inch	Ø76	3"	Ø76	3"
<b>MACHINE GENERAL FEATURES</b>					
Total Power	kW	1,1		1,1	
Ring Rotation Speed	rpm	28		28	
Average Cycle Time	seconds	5		6	
Electric Supply	V AC	400 3P + 1N + 1G		400 3P + 1N + 1G	
Frequency	Hz	50 / 60		50 / 60	
Required Compressed Air	Bar	Min. 6		Min. 6	
Air Consumption	Lt/Cycle	8		8	
Standard Machine Dimensions (W X H X D)	mm/inch	1680 x 2152 x 1530	$66 \frac{1}{8}'' \times 84 \frac{3}{4}'' \times 60 \frac{1}{4}''$	1980 x 2152 x 1540	$77 \frac{15}{16}'' \times 84 \frac{3}{4}'' \times 60 \frac{5}{8}''$
Total Weight	kg	515		570	

# TAPEMASTER ADVANCE

BOXES

TAPE WRAPPING

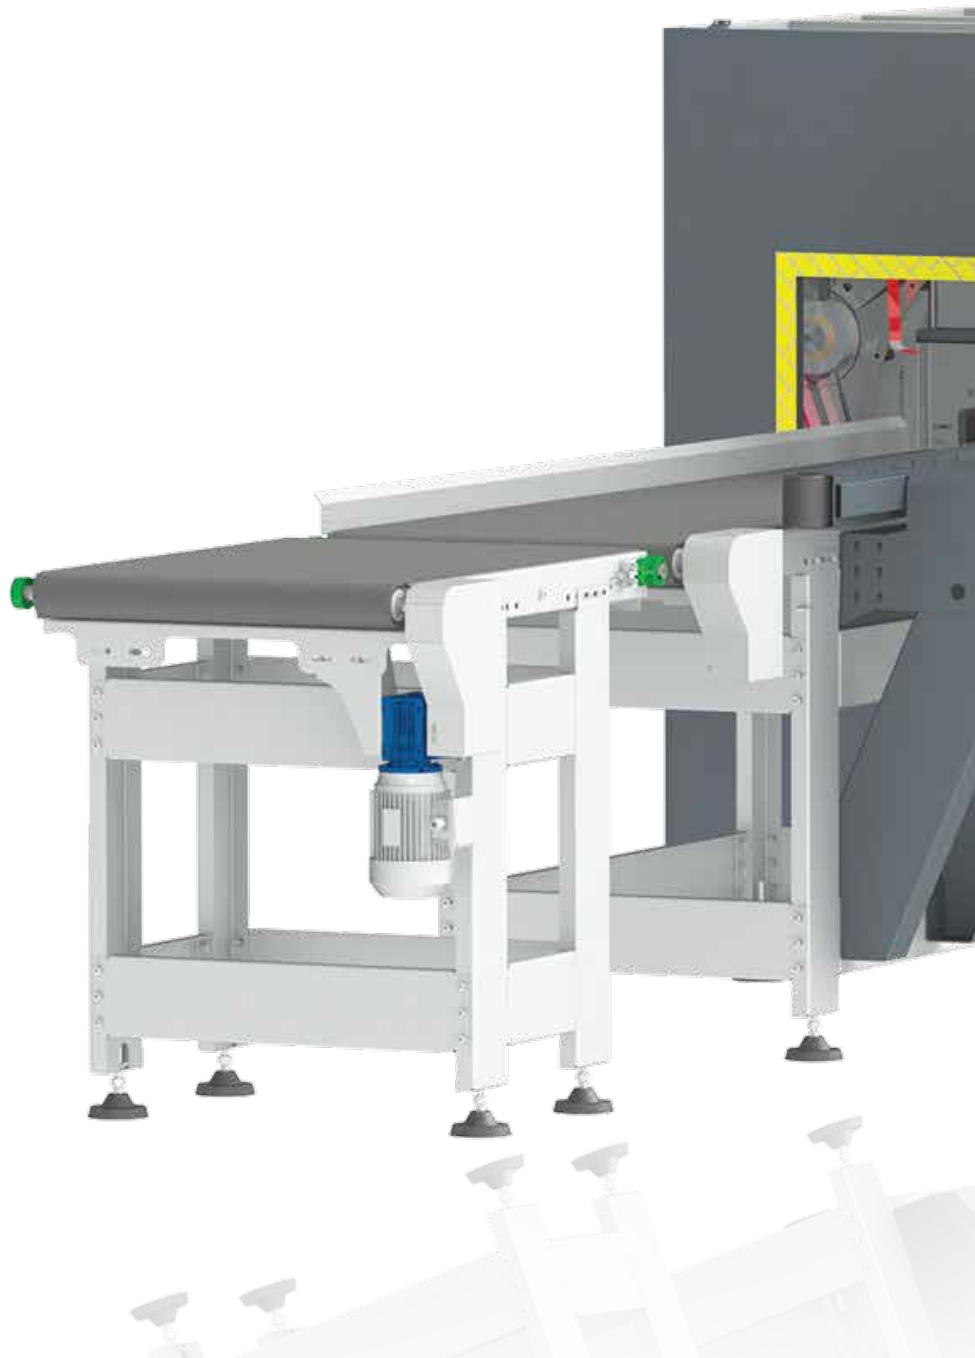

## TECHNICAL FEATURES

**M**

### PRODUCT TO TAPE DIMENSIONS

Max. Width x Height	mm/inch	980 x 260	$38 \frac{9}{16}'' \times 10 \frac{1}{4}''$
Min. Width x Height	mm/inch	350 x 50	$13 \frac{3}{4}'' \times 1 \frac{15}{16}''$
Min. Length	mm/inch	400	$15 \frac{3}{4}''$

### ADHESIVE TAPE FEATURES

Tape Width	mm/inch	45 - 65	$1 \frac{3}{4}'' - 2 \frac{9}{16}''$
Max. Tape Roll Diameter	mm/inch	Ø250	$9 \frac{13}{16}''$
Tape Roll Core Diameter	mm/inch	Ø76	$3''$



### MACHINE GENERAL FEATURES

Total Power	kW	5
Tape Wrapping Technology		Double independent wrapping units
Feeding System		Servo drive conveyor
Max. Rings Rotation Speed	rpm	28
Average Maching Speed	Boxes/min.	4
Electric Supply	V AC	400 V 3P + 1N + 1G, 50/60 Hz
Air Consumption	Lt/Cycle	14
Total Weight	kg	1800

Ask for details



TAPE WRAPPING

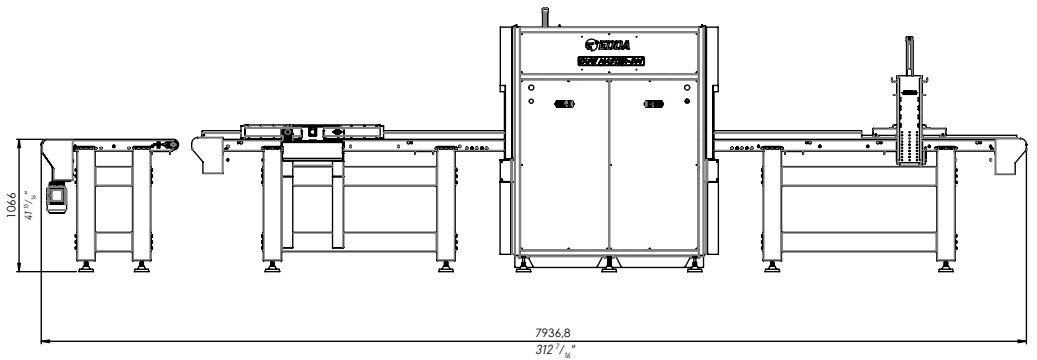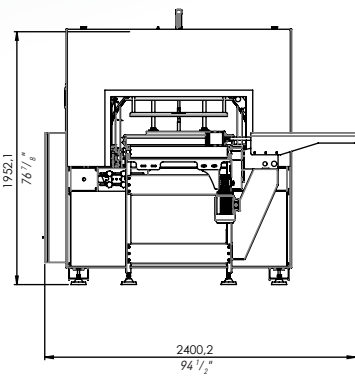



CARDBOARD PROCESSING





# BOXMASTER 2500

BOXES

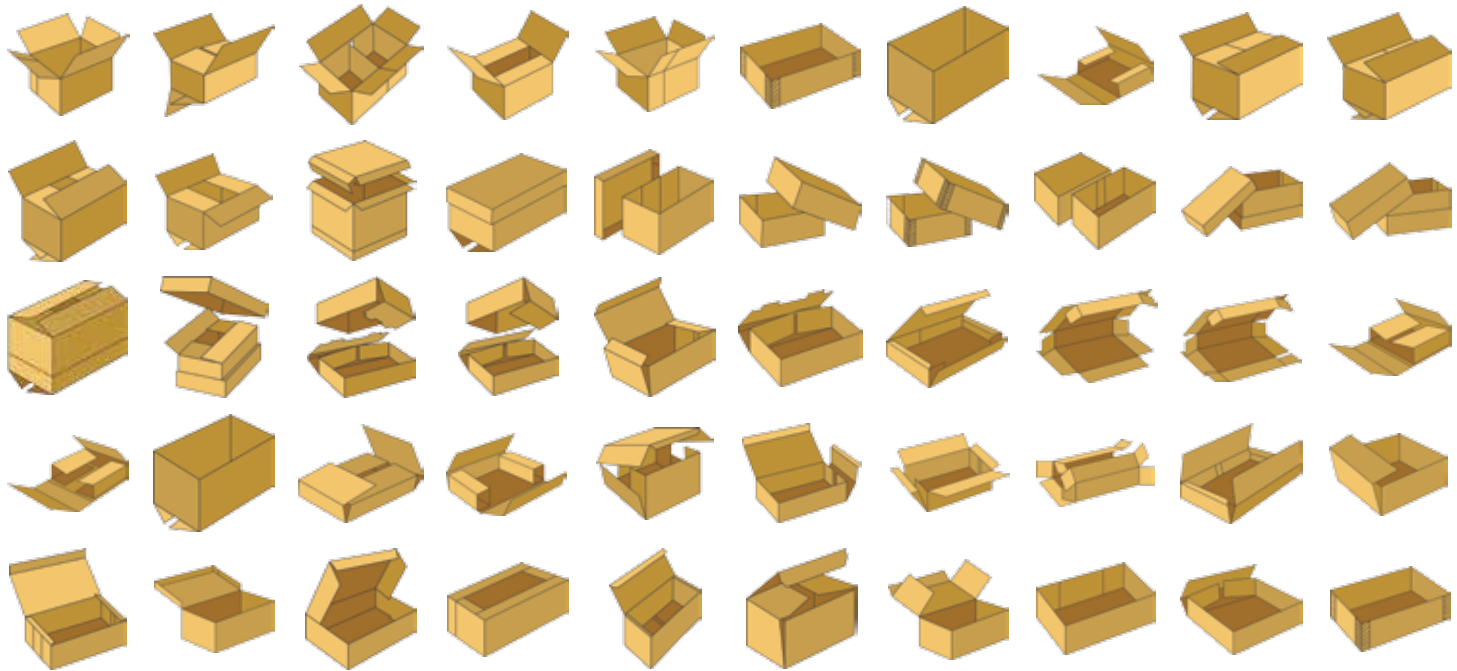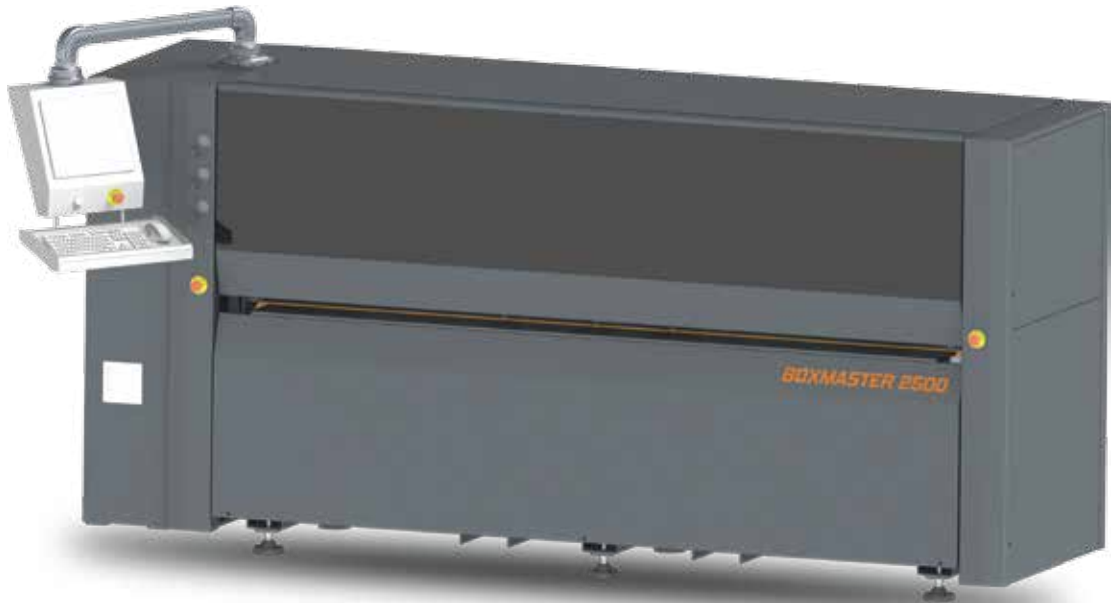

## TECHNICAL FEATURES

Tool Positioning System		Pin Positioning
Max. Cardboard Width	mm/inch	2500 $98 \frac{7}{16}$ "
Transversal Axis Speed	m/min	90
Longitudinal Axis Speed	m/min	45
Transversal Station		1
Longitudinal Station	optional	6 (7 - 10)
Min. Distance of Tools	mm/inch	35 $1 \frac{3}{8}$ "
Min. Length	mm/inch	350 $13 \frac{3}{4}$ "
Suitable Cardboard Thickness	mm/inch	2 - 7 $\frac{1}{16}$ " - $\frac{1}{4}$ "
Pre-defined Box Types		More than 50 pre-defined boxes
New Box Type Adding		Available
Cutting Tool Specifications		Ø76 x 22 x 2,00 High Speed Steel
Software		EDDAWORKS®
Operating Temperature		10°C (50°F) - 40°C (104°F)
Electric Supply	Volt	380 - 400, 50/60 Hz, 3P + 1N + 1G
Total Power	kW	2,5
Total Weight	kg	1800

Ask for details



The screenshot displays the BOXMASTER software interface. The main window shows a list of templates (BOX 202 to BOX 221) with BOX 210 selected. A 3D model of the box is shown next to the template. The configuration panel on the right includes:



- Material Width & Thickness:** Width: 1600.0, Thickness: 0.0, Trim: 0.
- Quantity:** 1, SideBySide: 1.

A secondary window titled 'BOX 210' provides more detailed settings:

- Dimension of CardBox:** L: 300.0, B: 300.0, H: 350.0, E: 0.0, A: 30.0, C: 0.0, D: 0.0.
- Material Width & Thickness:** Width: 1600.0, Thickness: 0.0, Trim: 0.
- Quantity:** 1, SideBySide: 1.
- Measurements:** Calculated Area: 1.24 m<sup>2</sup>, Waste Area: 0.37 m<sup>2</sup>, Wasteage: 23.13 %.
- Machine Status:** Power, Security Relay, Air Oil, Calibration, All Series OK.


The interface also shows a 'Turn 90°' button and a 'BOXMASTER 10-2500' logo.

CARDBOARD PROCESSING

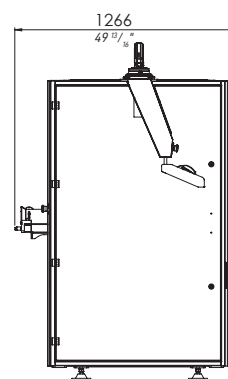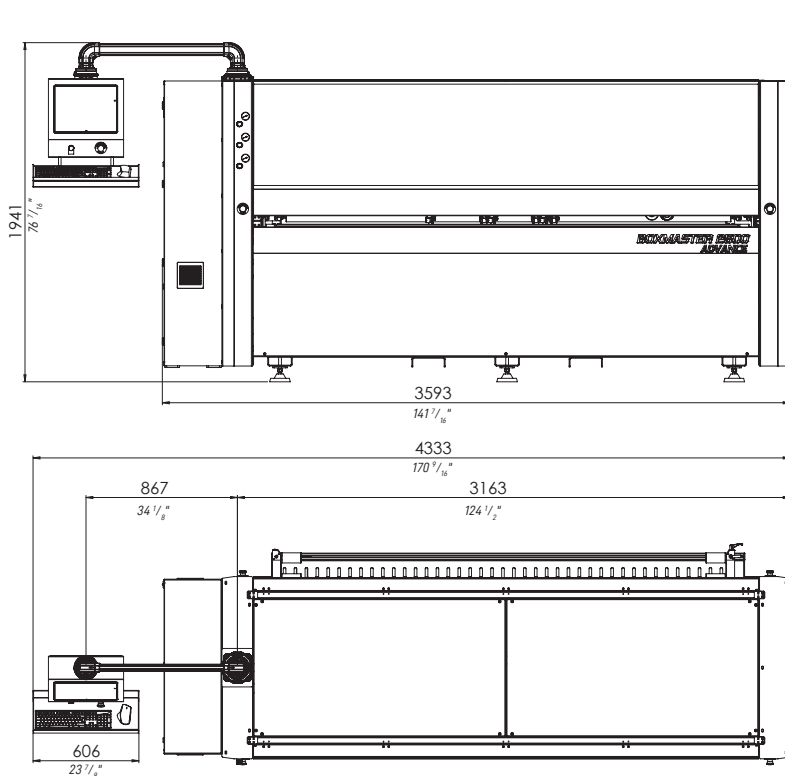


# BOXMASTER ADVANCE

BOXES

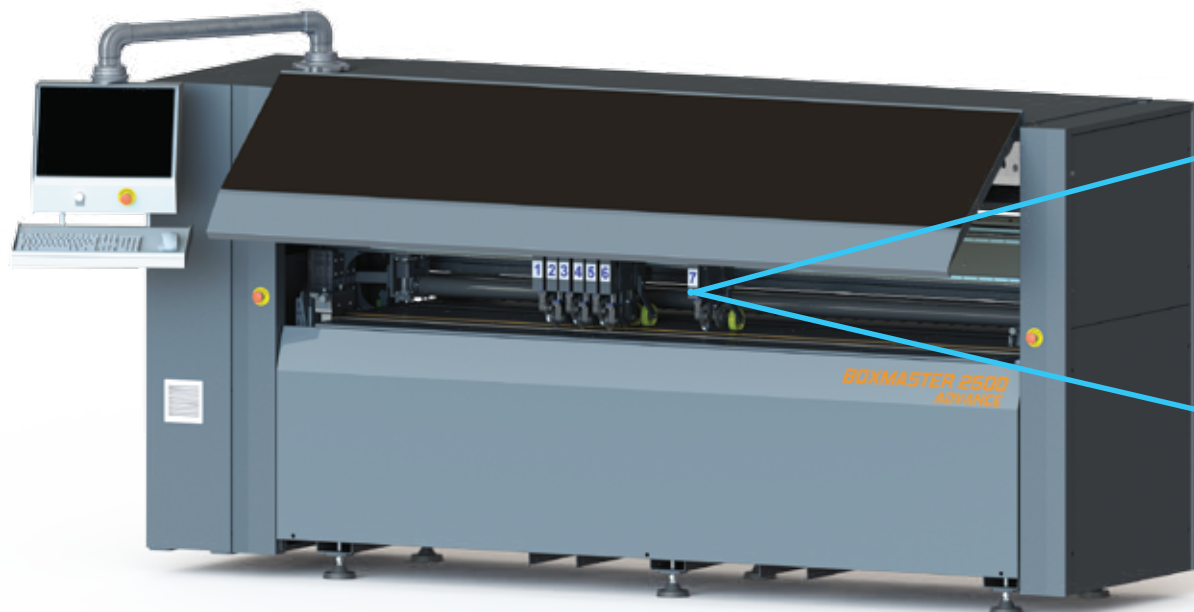




CARDBOARD PROCESSING

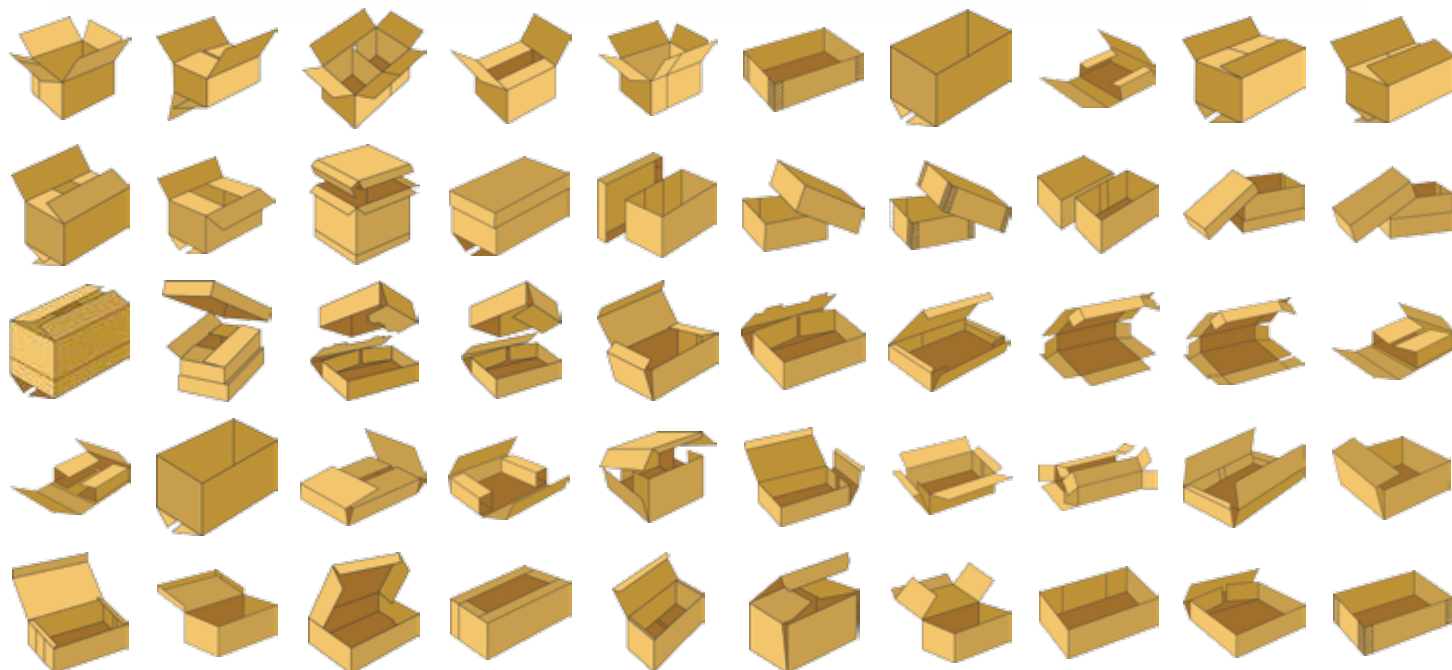

## TECHNICAL FEATURES

<b>Tool Positioning System</b>		Independent servo motor controlled longitudinal tool positioning
<b>Max. Cardboard Width</b>	<b>mm/inch</b>	2500 $98\frac{7}{16}$ "
<b>Transversal Axis Speed</b>	<b>m/min</b>	90
<b>Longitudinal Axis Speed</b>	<b>m/min</b>	45
<b>Transversal Station</b>		1
<b>Longitudinal Station</b>	<b>optional</b>	6 (7 - 16)
<b>Min. Distance of Tools</b>	<b>mm/inch</b>	35 $1\frac{3}{8}$ "
<b>Min. Length</b>	<b>mm/inch</b>	350 $13\frac{3}{4}$ "
<b>Suitable Cardboard Thickness</b>	<b>mm/inch</b>	2 - 7 $\frac{1}{16}$ " - $\frac{1}{4}$ "
<b>Pre-defined Box Types</b>		More than 50 pre-defined boxes
<b>New Box Adding</b>		Available
<b>Cutting Tool Specifications</b>		Ø76 x 22 x 2,00 High Speed Steel
<b>Software</b>		EDDAWORKS®
<b>Operating Temperature</b>		10°C (50°F) - 40°C (104°F)
<b>Electric Supply</b>	<b>Volt</b>	380 - 400, 50/60 Hz, 3P + 1N + 1G
<b>Total Power</b>	<b>kW</b>	3
<b>Total Weight</b>	<b>kg</b>	2400

Ask for details

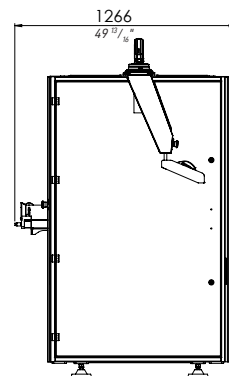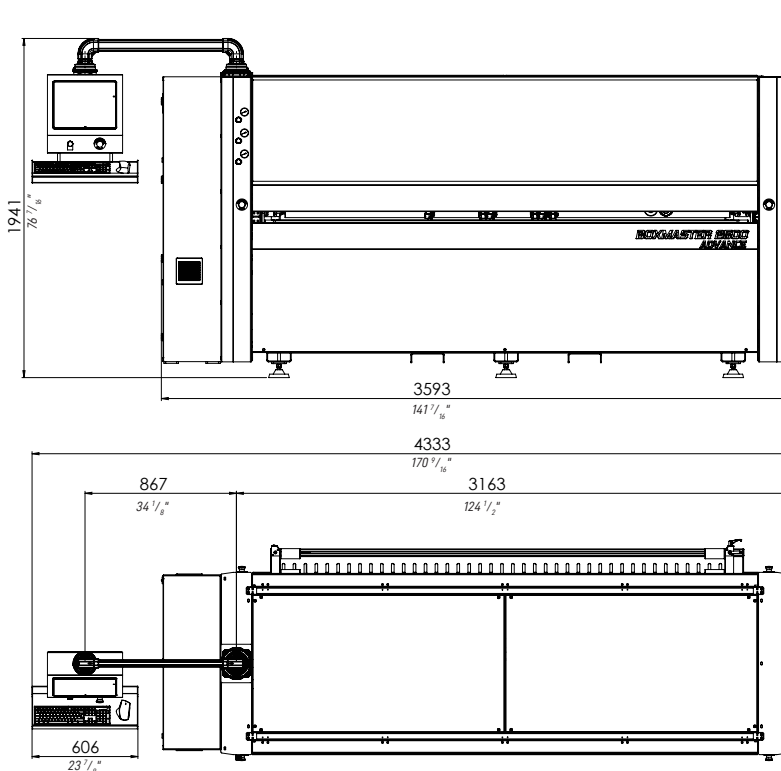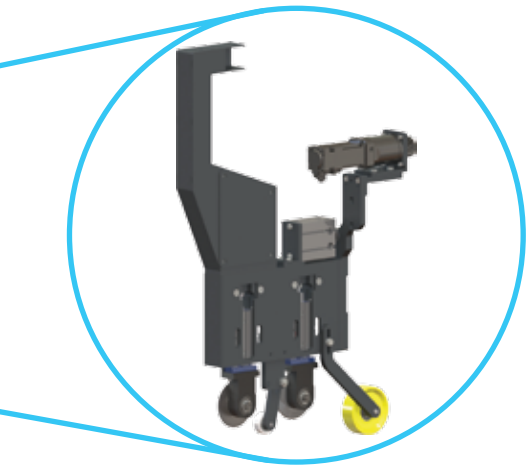

# SEALMASTER

BOXES


CARDBOARD PROCESSING



## TECHNICAL FEATURES

Cardboard Types		FEFCO 410	
Sealing Station		3	
Min. & Max. Cardboard Width	mm/inch	100 - 1200	$3\frac{15}{16}'' \times 47\frac{1}{4}''$
Min. & Max. Cardboard Length	mm/inch	100 - 2800	$3\frac{15}{16}'' \times 110\frac{1}{4}''$
Min. & Max. Cardboard Height	mm/inch	40 - 250	$1\frac{7}{16}'' \times 9\frac{13}{16}''$
Electrical Supply	Volt	380 - 400 50/60 Hz , 3P + 1N + 1G	
Software		SEALMASTER V1.0	
Total Power	kW	5	
Tank Capacity	L	4	
Max. Tank Pump Capacity	kg/h	35	
Tank Working Temperature Range	°C	30 - 240	
Dimensions ( W / L / H )	mm/inch	2200 / 9500 / 2200	$86\frac{5}{8}'' \times 374'' \times 86\frac{5}{8}''$
Total Weight	kg	3850	


Ask for details

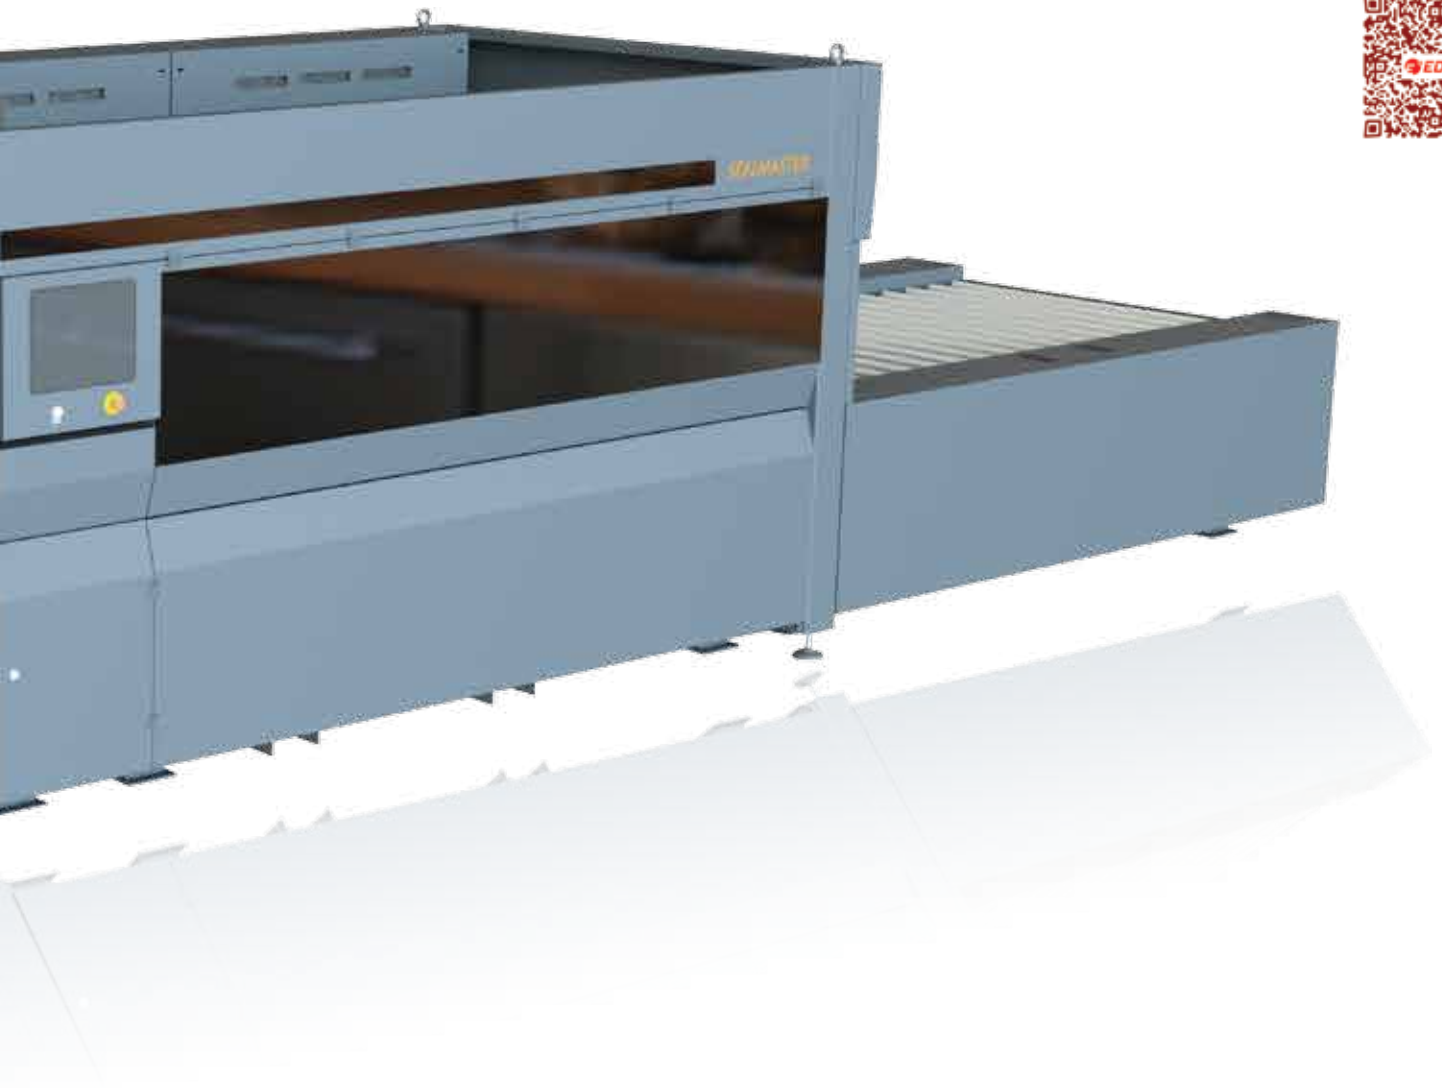

CARDBOARD PROCESSING

# SPINNER 1800 PACKING LINE

SOFAS - PALLETS - BED BASES - BEDROOM AND KITCHEN CABINETS - SANDWICH PANELS - WOOD PANELS - ALUMINIUM, STEEL AND WOOD PROFILES AND PIPES - PVC PROFILE PRODUCTS ETC.

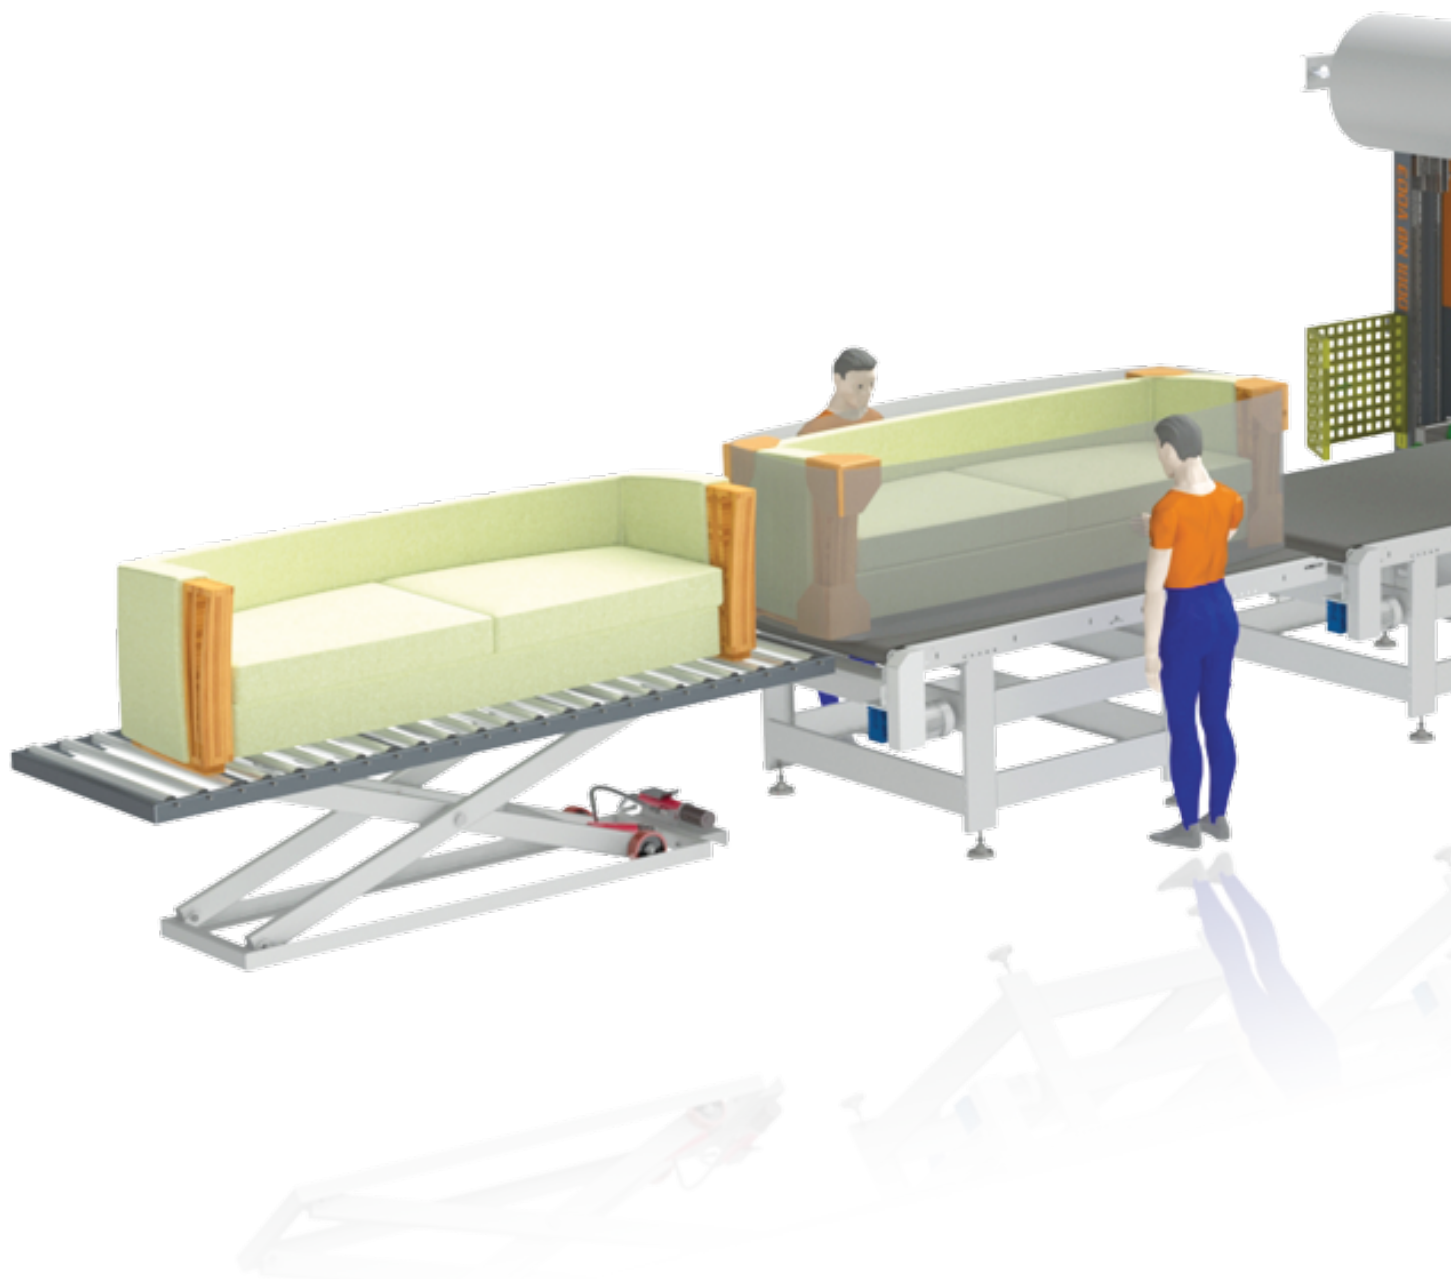

## TECHNICAL FEATURES

### PRODUCT TO WRAP SIZES

Max. Length		Unlimited	
Min. Dimensions (Width x Height x Length)	mm/inch	700 x 200 x 1200*	$27\frac{9}{16}'' \times 7\frac{7}{8}'' \times 47\frac{1}{4}''$




### CONVEYOR BELT'S FEATURES

Useful Length	mm/inch	2680	$105\frac{1}{2}''$
Total Length	mm/inch	2910	$114\frac{9}{16}''$
Working Height	mm/inch	950	$37\frac{3}{8}''$
Electric Motor Power	kW	0,55	
Max. Conveyor Speed	meter/min.	12	
Max. Load Capacity	kg	100	

### STRETCH FILM FEATURES

Max. Width	mm/inch	250	$9\frac{13}{16}''$
Max. Diameter	mm/inch	Ø230	$9\frac{1}{16}''$ (Max. Weight: 4,5 kg)
Reel Core Diameter	mm/inch	Ø76	3"
Recommended Film Thickness	micron	23, 30, 35	

Ask for details

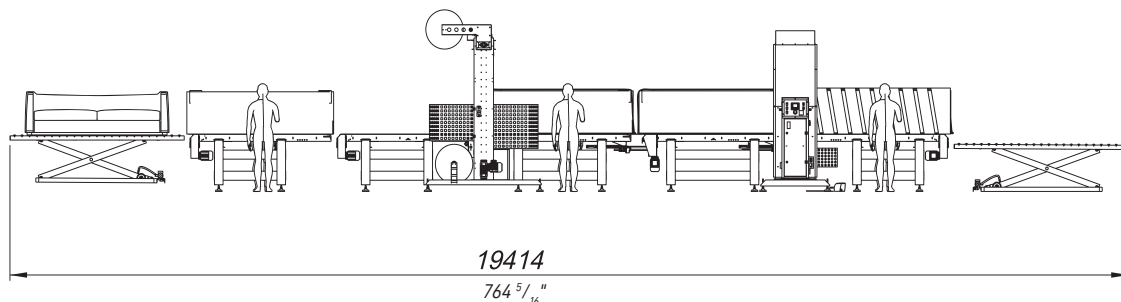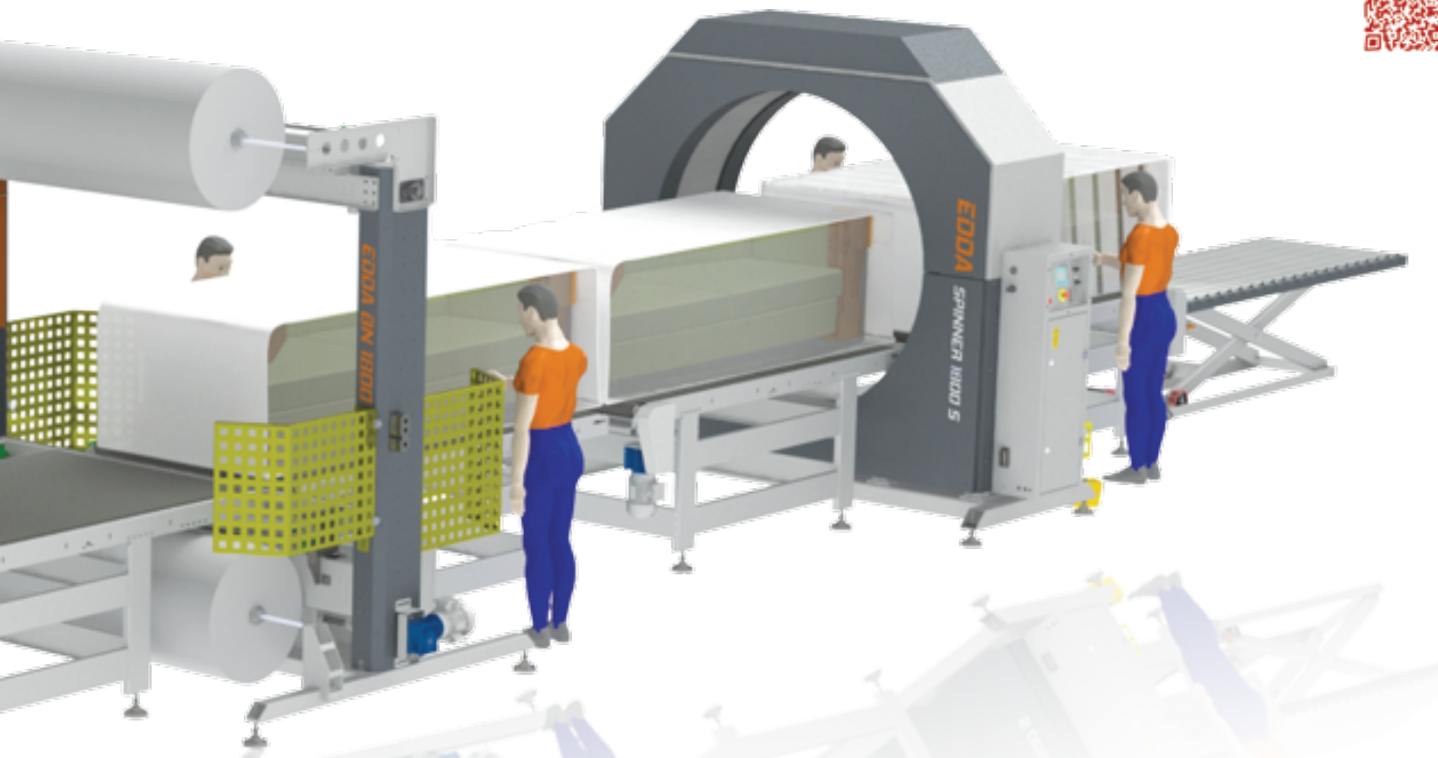

**AIR BUBBLE FILM UNIT**

Max. Film Width	mm/inch	2000	78 3/4"
Max. Film Reel Diameter	mm/inch	Ø650	25 9/16"
Reel Core Diameter	mm/inch	Ø20 ~ 76	13/16" ~ 3"
Suitable Film Materials		PE Film, PE Air Bubble Film, PE Foam Film, PVC Film	
Cutting System Operating Temperature	°C	50 ~ 150	

**MACHINE GENERAL FEATURES**


Main Motor Power	kW	3*
Max. Ring Rotation Speed	rpm	50
Min. Ring Rotation Speed	rpm	10
Total Weight	kg	5000*

\*Depends to machine configuration

# SPEEDWRAP PROFILELINE

ALUMINIUM, STEEL AND WOOD PROFILES AND PIPES - PVC PROFILE PRODUCTS ETC.

AUTOMATED LINES

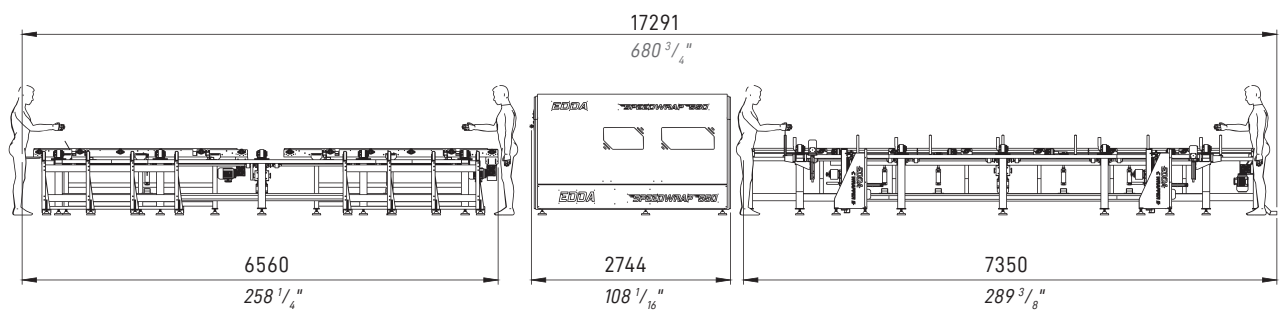

## TECHNICAL FEATURES

### PRODUCT TO WRAP SIZES

Max. Length	mm/inch	6000	236 1/4"
Max. Width x Max. Height	mm/inch	260 x 270	10 1/4" x 10 5/8"
Min. Dimensions (Width x Height x Length)	mm/inch	70 x 18 x 1000	2 3/4" x 11/16" x 39 3/8"



### CONVEYOR BELT'S FEATURES

Useful Length	*Check the technical drawing	
Total Length	*Check the technical drawing	
Working Height	*Check the technical drawing	
Electric Motor Power	kW	0,55
Max. Conveyor Speed	meter/min.	36
Max. Load Capacity	kg/meter	100

### MACHINE DIMENSIONS

\*Check the technical drawing

Ask for details

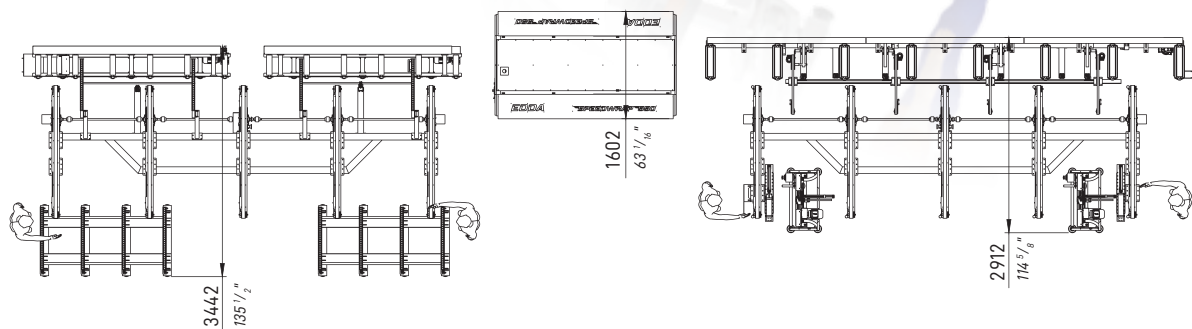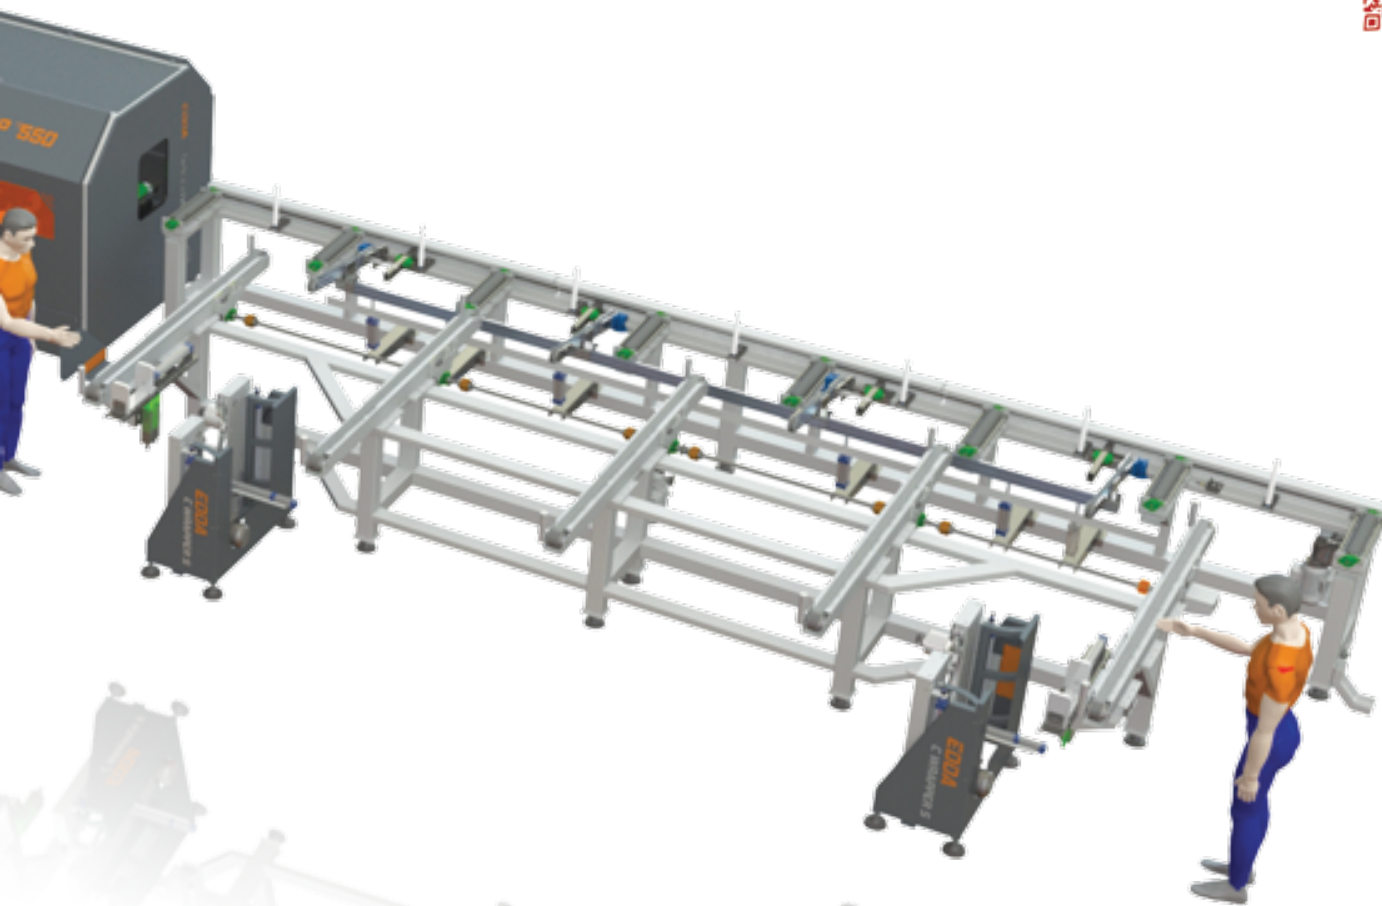

**STRETCH FILM FEATURES**

<b>Max. Width</b>	<b>mm/inch</b>	175	6 7/8"
<b>Max. Diameter</b>	<b>mm/inch</b>	Ø230	9 1/16"
<b>Reel Core Diameter</b>	<b>mm/inch</b>	Ø76	3"
<b>Recommended Thickness</b>	<b>micron</b>	23, 30, 35	
<b>Wrapping Technology</b>		Double cartridge units	

**MACHINE GENERAL FEATURES**

\*\*Please contact to Sales Representative for details

# HEAVY DUTY LINES

MEMBRANE, ACRYLIC AND LACQUER PAINTED COVERS - BATHROOMS AND KITCHEN CABINETS - DOORS - DOOR FRAMES AND MOULDINGS  
LAMINATE FLOORING - ALUMINIUM, STEEL AND WOOD PROFILES AND PIPES- PVC PROFILE PRODUCTS ETC.



## TECHNICAL FEATURES

### PRODUCT TO WRAP SIZES

<b>Max. Length</b>		Unlimited		
<b>Min. Dimensions (Width x Height x Length)</b>	<b>mm/inch</b>	100 x 20 x 1000	$3 \frac{15}{16}'' \times 13 \frac{1}{16}'' \times 39 \frac{3}{8}''$	* With Short Part Nail

### STRETCH FILM FEATURES

<b>Max. Width</b>	<b>mm/inch</b>	200	$7 \frac{7}{8}''$
<b>Max. Diameter</b>	<b>mm/inch</b>	Ø230	$9 \frac{1}{16}''$
<b>Reel Core Diameter</b>	<b>mm/inch</b>	Ø76	3"
<b>Recommended Thickness</b>	<b>micron</b>	23, 30, 35	

### MACHINE GENERAL FEATURES

<b>Main Motor Power</b>	<b>kW</b>	1,5	
<b>Max. Ring Rotation Speed</b>	<b>rpm</b>	80	
<b>Min. Ring Rotation Speed</b>	<b>rpm</b>	10	
<b>Standard Machine Dimensions (W X H X L)</b>	<b>mm/inch</b>	2191 x 2341 x 4271	$86 \frac{1}{4}'' \times 92 \frac{3}{16}'' \times 168 \frac{1}{8}''$
<b>Total Weight</b>	<b>kg</b>	980	



### CONVEYOR BELT'S FEATURES

\*\*Please contact your Sales Representative for details

Ask for details




AUTOMATED LINES

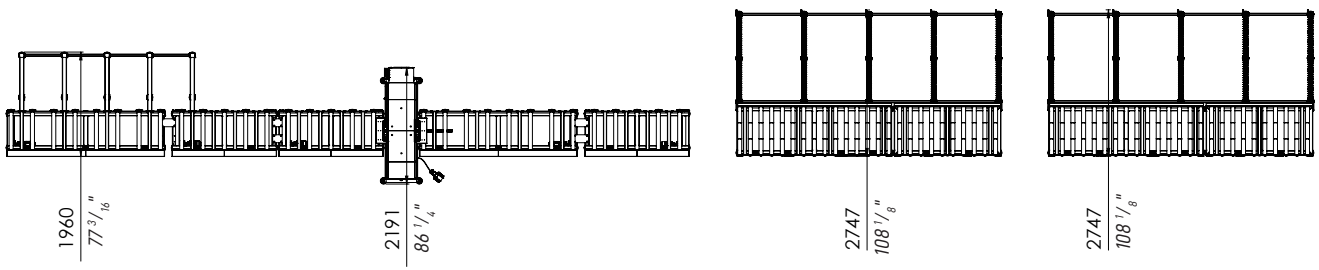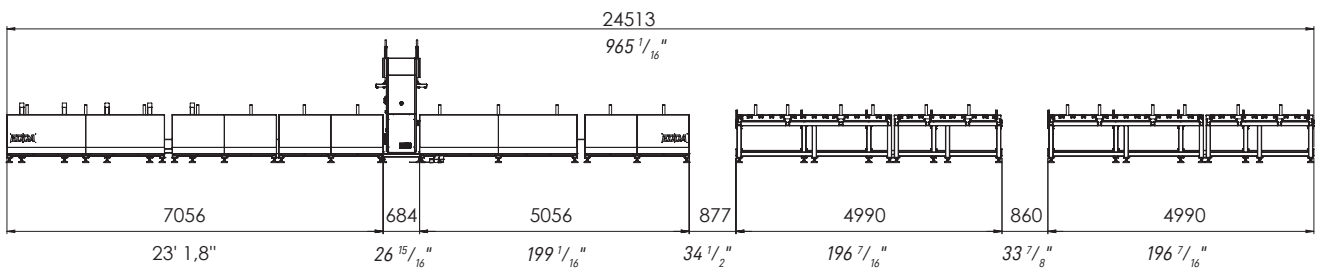


# OPTIONS

ACCESORIES AND OPTIONAL DEVICES FOR STANDARD MODELS

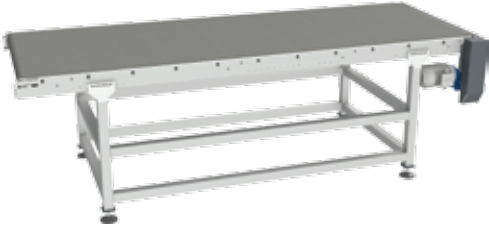

DIFFERENT LENGTH  
MOTORIZED CONVEYOR

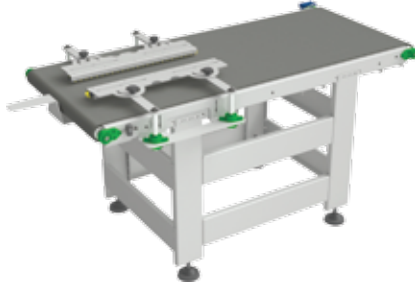


MANUAL ADJUSTING SIDE GUIDED  
MOTORIZED CONVEYOR




NON-MOTORIZED REEL CONVEYOR



BUFFERING TABLE

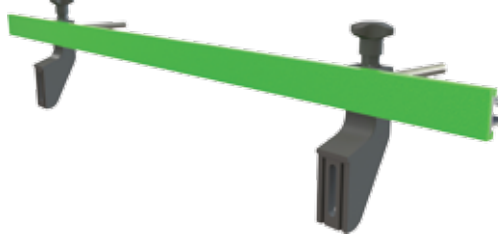

MANUAL SIDE GUIDE

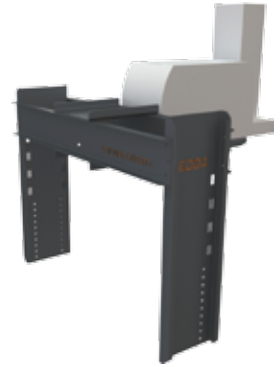


LABELING SYSTEM



SCISSOR LIFT FOR PALLET TRUCK (CLOSED)



SCISSOR LIFT FOR PALLET TRUCK (OPENED)

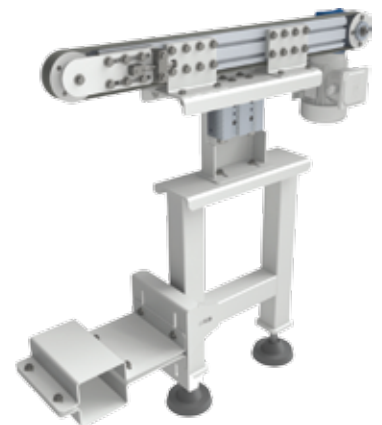


TRANSFER BELT

OPTIONS

# OPTIONS

ACCESORIES AND OPTIONAL DEVICES FOR STANDARD MODELS

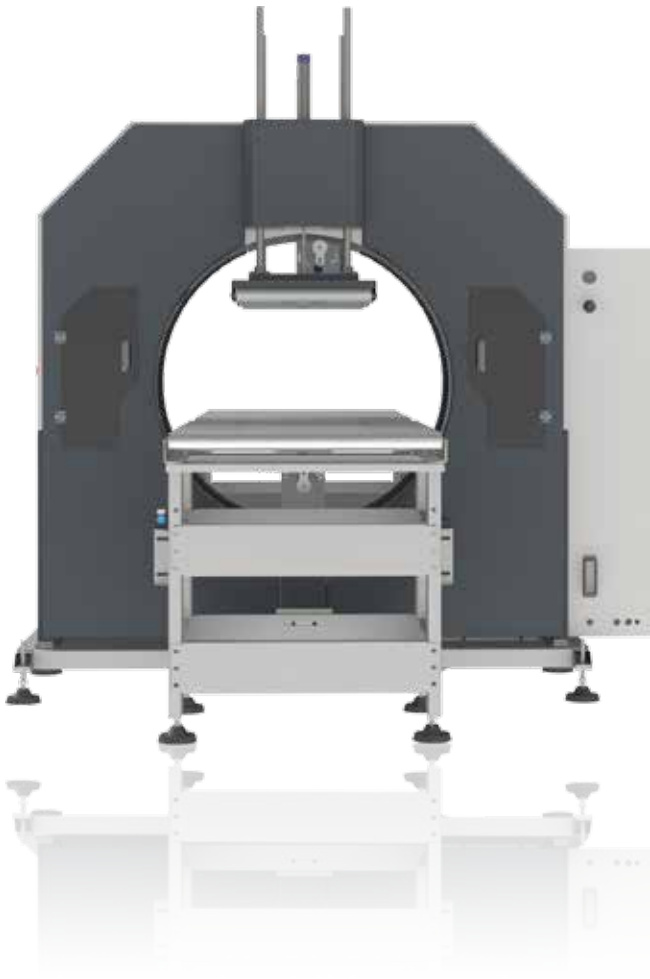

DOUBLE CARTRIDGE OPTION

CIRCULAR SHAPED PRODUCT WRAPPING SYSTEM



# OPTIONS

ACCESSORIES AND OPTIONAL DEVICES FOR STANDARD MODELS




C - WRAP



PNEUMATIC LIFTER CONVEYOR



AUTOMATIC CENTERING SIDE PRESS

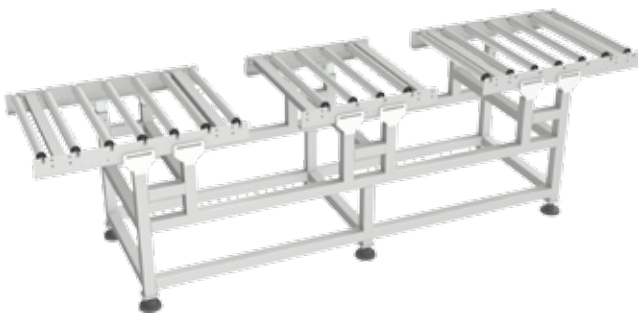


FORK-LIFT REEL TABLE




HEAVY DUTY ROLLER CONVEYOR  
\* Motorized / \* Non-motorized

# DIMENSIONAL CAPACITY


GRAPHICS OF PRODUCT DIMENSIONS TO WRAP




450 Series

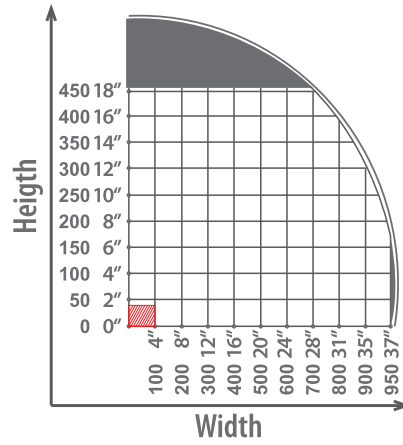


1000 Series

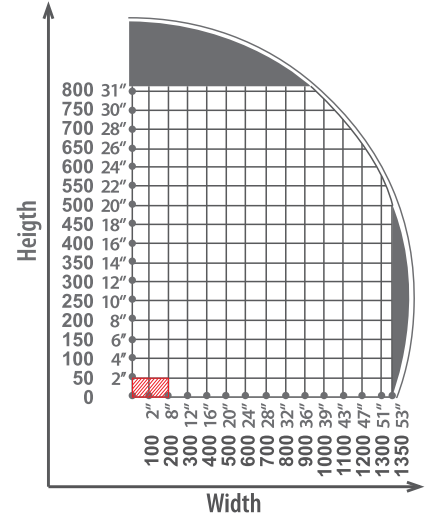

1500 Series

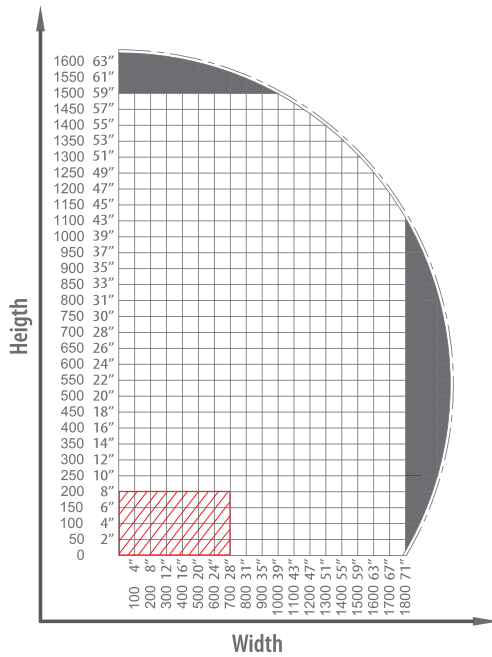

1800 Series

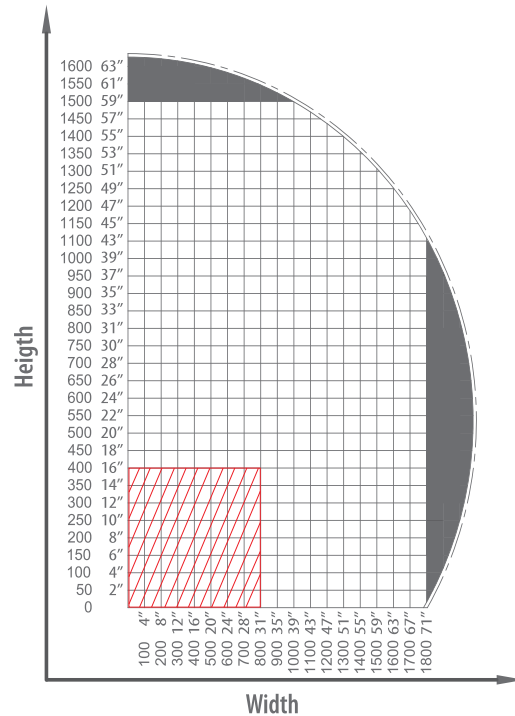




2200 Series



 Non - suitable dimensions



 **EDDA**<sup>®</sup>  
PACKAGING MACHINES

 Büyükbalıklı Mh. 1. Ayça Sk.  
No: 6 16250 Nilüfer / BURSA

 +90 (224) 441 23 41  
 +90 (224) 441 03 65

 info@eddamakine.com  
 www.eddamakine.com



**NEUMAN**